

## ADM-PM | PG and metric thread


## Accessories

Adaptor to combine different types of threads PG

Temperature: -40°C ... +200°C

## CHARACTERISTICS:

- Properties: high stability

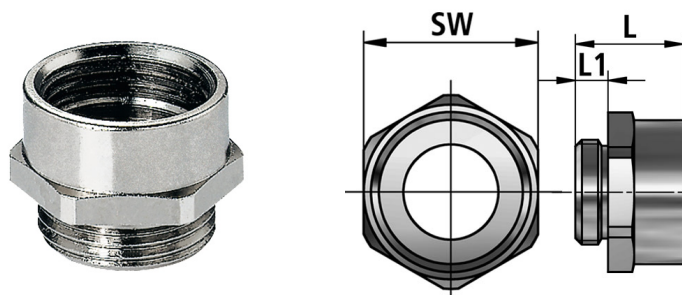

FLEXA No.	Outer thread	Inner thread	L1 [mm]	L [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
10370P07M12	PG7	M12x1, 5	5,0	15,0	14	0,670	100
10370P09M16	PG9	M16x1, 5	6,0	16,0	19	1,240	100
10370P11M16	PG11	M16x1, 5	6,0	16,0	22	2,250	100
10370P13M20	PG13, 5	M20x1, 5	6,5	17,5	24	2,100	100
10370P16M20	PG16	M20x1, 5	6,5	17,5	27	3,100	100
10370P16M25	PG16	M25x1, 5	6,5	18,5	30	2,800	100
10370P21M25	PG21	M25x1, 5	7,0	19,0	32	4,440	100
10370P21M32	PG21	M32x1, 5	7,0	20,0	36	4,400	100
10370P29M40	PG29	M40x1, 5	8,0	21,0	43	4,880	50
10370P36M50	PG36	M50x1, 5	9,0	23,0	55	9,200	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.