

ADMF

Accessories


Fire protection closure, inner | outer thread, fire barrier for fed-through cables, minimum of 30 minutes fire blocking (E30)

Temperature: -40°C ... + 600°C ^
+850°C

Material: Body: nickel-plated brass | galvanized steel on request, O-ring: Perbunan, Inlay: carbon based

CHARACTERISTICS:

- Properties: minimum of 30 minutes fire blocking (E30)
- horizontal and vertical fitting position fire barrier in combination with connectors
- REACH and RoHS compliant Application: Railway industry acc. to EN 45545-3: E30
- Electrical installations for application rules machine and plant constructions acc. to DIN EN 60204

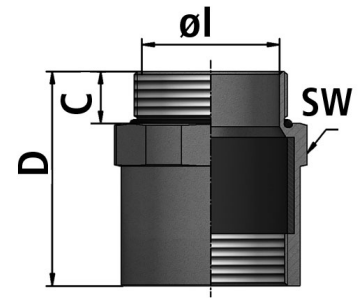

FLEXA No.	Thread type	Ø l [mm]	C [mm]	D [mm]	WS [mm]	PU [pcs.]
15010033016	M16x1,5	13,0	12,0	38,5	22	25
15010033020	M20x1,5	16,5	12,0	41,0	27	25
15010033025	M25x1,5	21,0	13,0	49,0	32	10
15010033032	M32x1,5	27,5	14,0	52,5	41	10
15010033040	M40x1,5	35,0	17,0	63,5	46	2
15010033050	M50x1,5	45,0	17,0	70,0	60	2

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.