


ROHRflex-Duo PA 6

ROHRflex corrugated plastic tubings

Protective all-plastic tubing, internally and externally corrugated, two-pieces, longitudinal dividable, recloseable, HB (UL 94)

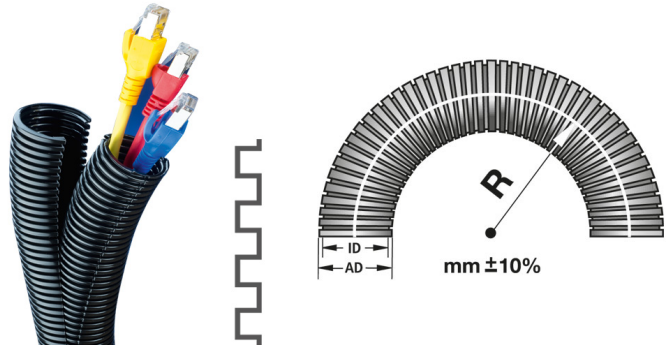

Temperature: -40°C ... +120°C ^ +150°C

Material: PA 6 plastics

IP class [acc. to EN 60529]: IP 40

CHARACTERISTICS:

- Properties: good chemical resistance
- free of silicone, cadmium, halogen
- self-extinguishing
- flame retardant
- flexible bending strength
- UV-resistant

APPLICATIONS:

- Application: for retrofit and repair / switch cabinet construction / insulated electrical installations for application / rules machine and plant constructions acc. to DIN EN 60204 / electrical installations



FLEXA No.	Colour	OD [mm]	Profile	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
10269202006	Black	10,0	fine	5,6	10,3	30	90	0,030	50
10269202008	Black	13,0	fine	8,5	13,3	35	110	0,040	50
10269202010	Black	15,8	fine	11,0	16,0	40	120	0,060	50
10269202014	Black	21,2	fine	15,1	21,3	55	170	0,070	50
10269202019	Black	25,6	fine	19,1	25,6	75	230	0,100	50
10269202020	Black	28,5	fine	21,9	28,5	95	290	0,110	50
10269202024	Black	31,7	fine	24,0	31,7	110	330	0,130	50
10269202026	Black	34,5	fine	27,2	35	120	360	0,160	25
10269202032	Black	42,5	fine	32,0	42,5	135	410	0,200	25
10269202043	Black	54,5	fine	43,9	53,9	140	420	0,270	25
10269202061	Black	79,0	fine	62,2	79,0	200	600	0,540	10
10269202106	Black	10,0	fine	5,6	10,3	30	90	0,030	10
10269202108	Black	13,0	fine	8,5	13,3	35	110	0,040	10
10269202110	Black	15,8	fine	11,0	16,0	40	120	0,060	10
10269202114	Black	21,2	fine	15,1	21,3	55	170	0,070	10
10269202120	Black	28,5	fine	21,9	28,5	95	290	0,110	10
10269202126	Black	34,5	fine	27,2	35,0	120	360	0,160	5
10269202132	Black	42,5	fine	32,0	42,5	135	410	0,200	5
10269202143	Black	54,5	fine	43,9	53,9	140	420	0,270	5
10269202161	Black	79,0	fine	62,2	79,0	200	600	0,540	5

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.