


GMK-M | for metric threads

Accessories

Counternut especially for metric plastic threads

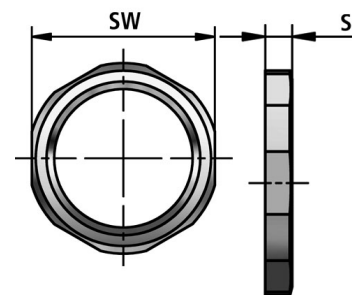

Temperature: -40 °C ... +100°C

Material: polyamide, fibre-glass reinforced

CHARACTERISTICS:

- Properties: resistant against light acids and soft lyes
- resistant against sea water, benzine and mineral oil



| FLEXA No. | Thread type | Colour | S [mm] | WS [mm] | Weight [kg/100] | PU [pcs.] |
|-------------|-------------|--------|--------|---------|-----------------|-----------|
| 10309000210 | M 10 x 1,5 | Black | 3,0 | 14 | 0,040 | 100 |
| 10309000212 | M 12 x 1,5 | Black | 5,0 | 17 | 0,100 | 100 |
| 10309000216 | M 16 x 1,5 | Black | 5,0 | 22 | 0,150 | 100 |
| 10309000220 | M 20 x 1,5 | Black | 6,0 | 26 | 0,230 | 100 |
| 10309000225 | M 25 x 1,5 | Black | 6,0 | 32 | 0,260 | 100 |
| 10309000232 | M 32 x 1,5 | Black | 7,0 | 41 | 0,380 | 100 |
| 10309000240 | M 40 x 1,5 | Black | 7,0 | 50 | 0,660 | 50 |
| 10309000250 | M 50 x 1,5 | Black | 8,0 | 60 | 1,080 | 25 |
| 10309000263 | M 63 x 1,5 | Black | 8,0 | 75 | 1,900 | 10 |
| 10309000012 | M 12 x 1,5 | Grey | 5,0 | 17 | 0,100 | 100 |
| 10309000016 | M 16 x 1,5 | Grey | 5,0 | 22 | 0,150 | 100 |
| 10309000020 | M 20 x 1,5 | Grey | 6,0 | 26 | 0,230 | 100 |
| 10309000025 | M 25 x 1,5 | Grey | 6,0 | 32 | 0,260 | 100 |
| 10309000032 | M 32 x 1,5 | Grey | 7,0 | 41 | 0,380 | 100 |
| 10309000040 | M 40 x 1,5 | Grey | 7,0 | 50 | 0,660 | 50 |
| 10309000050 | M 50 x 1,5 | Grey | 8,0 | 60 | 1,080 | 25 |
| 10309000063 | M 63 x 1,5 | Grey | 8,0 | 75 | 1,900 | 10 |

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.