

## AIRflex-K

## Protective plastic conduits

Protective all-plastic conduit, strip-wound, plain inside surface, integrated helix of rigid plastic


**Temperature:** -25°C ... +90°C ^ +100°C

**Material:** PVC

**IP class [acc. to EN 60529]:** IP 68

## CHARACTERISTICS:

- Properties: V0 according to UL 94
- extremely flexible
- airtight and liquid tight
- widely resistant to oil and acids
- free of silicone and cadmium
- easy drawing-in of cables

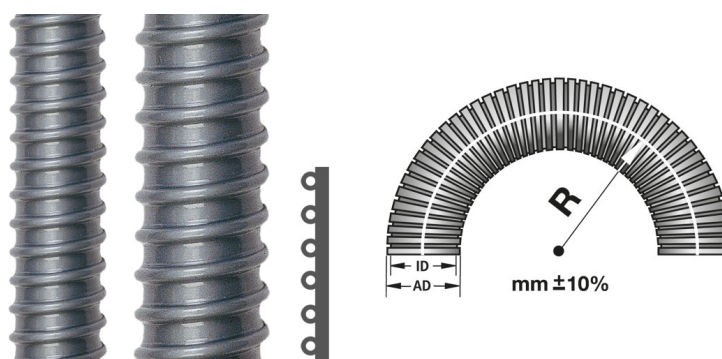

## APPLICATIONS:

- Application: machine and plant constructions / automotive / shipbuilding / automation / electrical installations



FLEXA No.	Colour	OD [mm]	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
10200101007	Grey	10,0	7,0	10,0	16	40	0,050	50
10200101010	Grey	14,0	10,0	14,0	18	45	0,070	50
10200101013	Grey	17,0	13,0	17,0	22	55	0,090	50
10200101015	Grey	19,0	15,0	19,0	25	65	0,110	50
10200101016	Grey	21,0	16,0	21,0	30	75	0,120	50
10200101021	Grey	27,0	21,0	27,0	40	100	0,220	50
10200101029	Grey	36,0	29,0	36,0	50	125	0,300	25
10200101038	Grey	45,0	38,0	45,0	60	150	0,380	25
10200101048	Grey	56,0	48,0	56,0	100	250	0,540	25
10201101007	Grey	10,0	7,0	10,0	16	40	0,050	10
10201101010	Grey	14,0	10,0	14,0	18	45	0,070	10
10201101013	Grey	17,0	13,0	17,0	22	55	0,090	10
10201101015	Grey	19,0	15,0	19,0	25	65	0,110	10
10201101016	Grey	21,0	16,0	21,0	30	75	0,120	10
10201101021	Grey	27,0	21,0	27,0	40	100	0,220	10
10201101029	Grey	36,0	29,0	36,0	50	125	0,300	10
10201101038	Grey	45,0	38,0	45,0	60	150	0,380	10
10201101048	Grey	56,0	48,0	56,0	100	250	0,540	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.