


## AIRflex-KUW-PVC-AS

## Protective plastic conduits

Protective plastic conduit, helical coiled corrugated, spiral of PVC sheathed spring steel wire, fixed soft PVC sheathing

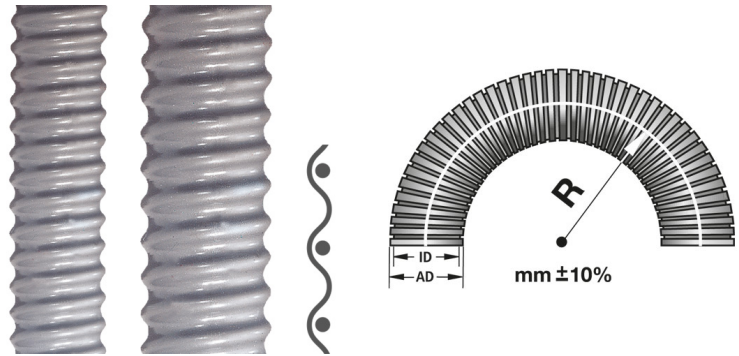

**Temperature:** -25°C ... +90°C ^ +100°C

**Material:** PVC

**IP class [acc. to EN 60529]:** IP 68

## CHARACTERISTICS:

- Properties: extremely flexible
- expansible and upsettable
- airtight and liquid tight
- widely resistant to oil and acids
- free of silicone and cadmium
- inside protection against corrosion
- approved acc. to DIN EN ICE 61386-23

## APPLICATIONS:

- Application: machine and plant constructions / automotive / shipbuilding / automation / electrical installations / applications with guide chains / suitable as suction conduit



FLEXA No.	Colour	OD [mm]	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
12030101007	Grey	10,0	7,0	10,0	8	20	0,041	50
12030101010	Grey	14,0	10,0	14,0	10	25	0,076	50
12030101013	Grey	17,0	13,0	17,0	13	35	0,103	50
12030101015	Grey	19,0	15,0	19,0	15	40	0,120	50
12030101016	Grey	21,0	16,0	21,0	17	45	0,170	50
12030101021	Grey	27,0	22,0	27,0	20	50	0,300	50
12030101029	Grey	36,0	29,0	36,0	25	65	0,420	25
12030101038	Grey	45,0	38,0	45,0	36	90	0,520	25
12030101048	Grey	56,0	48,0	56,0	40	100	0,800	25
12031101007	Grey	10,0	7,0	10,0	8	20	0,041	10
12031101010	Grey	14,0	10,0	14,0	10	25	0,076	10
12031101013	Grey	17,0	13,0	17,0	13	35	0,103	10
12031101015	Grey	19,0	15,0	19,0	15	40	0,120	10
12031101016	Grey	21,0	16,0	21,0	17	45	0,170	10
12031101021	Grey	27,0	22,0	27,0	20	50	0,300	10
12031101029	Grey	36,0	29,0	36,0	25	65	0,420	10
12031101038	Grey	45,0	38,0	45,0	36	90	0,520	10
12031101048	Grey	56,0	48,0	56,0	40	100	0,800	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.