

## ROHRflex MULTI PA 6 | cable buncher

### ROHRflex corrugated plastic tubings

Protective all-plastic tubing, internally and externally corrugated, fine profile, as cable buncher, for large quantity of cables, HB (UL 94)


**Temperature:** -40°C ... +120°C ^ +150°C

**Material:** PA 6 plastics

**IP class [acc. to EN 60529]:** IP 68 | IP 69K

#### CHARACTERISTICS:

- Properties: non-crush
- air- and liquid-tight
- free of silicone, cadmium, halogen
- flame retardant
- UV-resistant
- oil resistant up to + 80° C
- benzine resistant
- widely resistant to acid and solvents
- HB acc. to UL 94

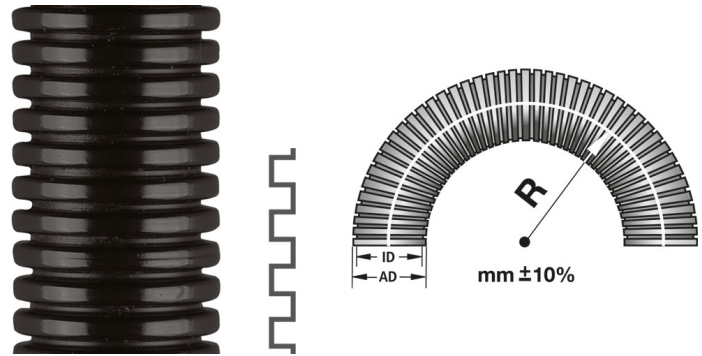

#### APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations



FLEXA No.	Colour	NW [mm]	Profile	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
10206202056	Black	56,0		56,3	67,2	130	270	0,460	10
10206202070	Black	70,0		66,5	79,2	170	350	0,500	10
10206202095	Black	95,0		91,0	106,0	225	450	0,950	10
10206201070	Grey	70,0		66,5	79,2	170	350	0,500	10
10206201095	Grey	95,0		91,0	106,0	225	450	0,950	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.