


OR-P | for PG threads

Accessories

O-ring for PG threads, resistant against oil, protection against water and dust

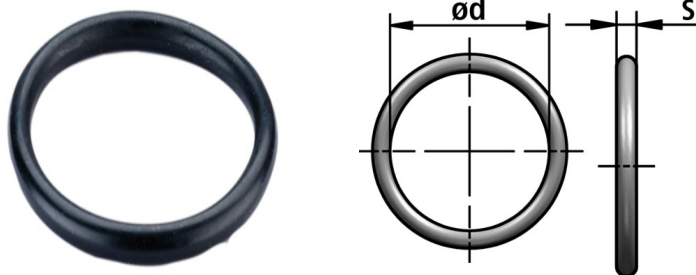

Temperature: -20 °C ... +120°C

Material: perbunan

CHARACTERISTICS:

- Properties: resistant against oil
- protection against water and dust



FLEXA No.	Thread type	Ø d [mm]	S [mm]	Weight [kg/100]	PU [pcs.]
10330000007	PG7	10,0	1,5	0,008	50
10330000009	PG9	12,5	1,8	0,014	50
10330000011	PG11	16,0	2,0	0,022	50
10330000013	PG13, 5	18,0	2,0	0,025	50
10330000016	PG16	20,0	2,0	0,027	50
10330000021	PG21	26,0	2,0	0,035	25
10330000029	PG29	34,0	2,0	0,044	25
10330000036	PG36	44,0	2,5	0,090	25
10330000048	PG48	53,0	2,5	0,107	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.