

ROHRflex PA 12-ESD

ROHRflex corrugated plastic tubings

Protective all-plastic tubing, internally and externally corrugated, fine profile, for heavy applications, EX area, HB (UL 94)


Temperature: -50°C ... +100°C ^ +130°C

Material: PA 12 plastics

IP class [acc. to EN 60529]: IP 68 | IP 69K

CHARACTERISTICS:

- Properties: high alternate bending strength
- improved insulation properties
- air- and liquid-tight
- oil and benzine resistant
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- UV-resistant

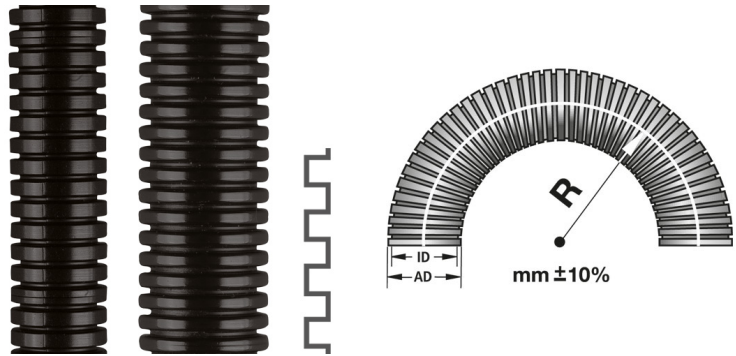

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / electrical installations / ex area



FLEXA No.	Colour	OD [mm]	Profile	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
10259202006	Black	10,0	fine	6,5	10,0	13	35	0,020	50
10259202010	Black	13,0	fine	10,0	13,0	15	45	0,025	50
10259202012	Black	15,8	fine	12,0	15,8	22	55	0,030	50
10259202014	Black	18,5	fine	14,3	18,5	27	65	0,050	50
10259202016	Black	21,2	fine	16,5	21,2	45	75	0,075	50
10259202023	Black	28,5	fine	23,0	28,5	55	100	0,108	50
10259202029	Black	34,5	fine	29,0	34,5	65	120	0,132	25
10259202036	Black	42,5	fine	36,0	42,5	90	150	0,145	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.