

## ROHRflex PA 6-D

## ROHRflex corrugated plastic tubings

Protective all-plastic tubing, internally and externally corrugated, thick-walled, fine or coarse profile, for heavy applications, VO (UL 94), EN 45545-2 (HL3)


**Temperature:** -40°C ... +120°C ^ +150°C

**Material:** PA 6 plastics

**IP class [acc. to EN 60529]:** IP 68 | IP 69K

## CHARACTERISTICS:

- Properties: high cross pressure strength
- air- and liquid-tight
- oil resistant up to + 80° C
- benzine resistant
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- flame retardant
- self-extinguishing
- UV-resistant

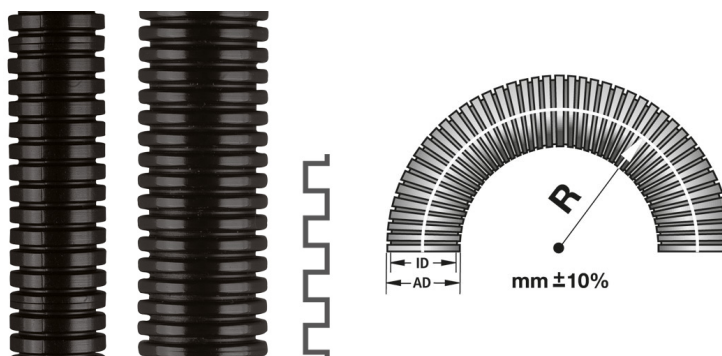

## APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations



FLEXA No.	Colour	OD [mm]	Profile	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
10237202006	Black	10,0	fine	6,4	10,0	15	35	0,020	50
10237202010	Black	13,0	fine	9,6	12,9	25	45	0,030	50
10237202012	Black	15,8	fine	11,8	15,7	35	55	0,040	50
10237202014	Black	18,5	fine	13,8	18,2	40	65	0,060	50
10237202016	Black	21,2	fine	16,1	21,2	50	75	0,080	50
10237202023	Black	28,5	fine	22,5	28,4	60	100	0,130	50
10237202029	Black	34,5	fine	28,5	34,4	70	120	0,150	25
10237202036	Black	42,5	fine	35,6	42,6	100	150	0,200	25
10237202048	Black	54,5	fine	47,5	54,5	110	190	0,260	25
10237232016	Black	21,2	coarse	16,0	21,2	50	75	0,070	50
10237232023	Black	28,5	coarse	21,4	28,5	60	100	0,120	50
10237232029	Black	34,5	coarse	27,1	34,3	70	120	0,160	25
10237232036	Black	42,5	coarse	34,8	42,2	100	150	0,180	25
10237232048	Black	54,5	coarse	47,0	54,2	110	190	0,260	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.