

ROHRflex PA 6-HT

ROHRflex corrugated plastic tubings

Protective all-plastic tubing, internally and externally corrugated, fine profile, for high temperatures, V2 (UL 94)


Temperature: -25°C ... +150°C ^ +170°C

Material: PA 6 plastics

IP class [acc. to EN 60529]: IP 68 | IP 69K

CHARACTERISTICS:

- Properties: air- and liquid-tight
- oil resistant up to + 80° C
- benzine resistant
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- self-extinguishing
- flame retardant
- UV-resistant

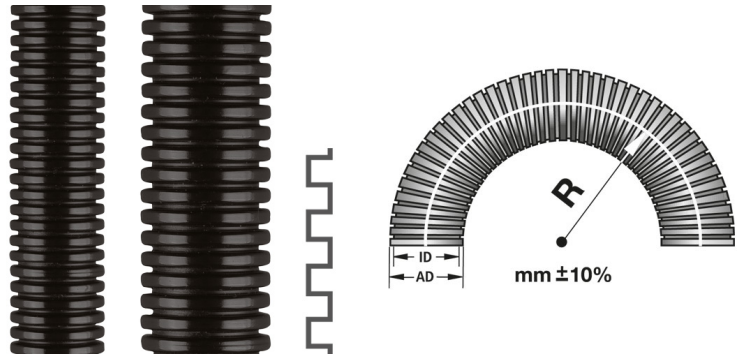

APPLICATIONS:

- Application: machine and plant constructions / automotive / electrical installations



FLEXA No.	Colour	OD [mm]	Profile	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
10254202006	Black	10,0	fine	6,7	10,0	13	35	0,020	50
10254202010	Black	13,0	fine	9,7	12,9	20	45	0,025	50
10254202012	Black	15,8	fine	12,1	15,7	35	55	0,030	50
10254202016	Black	21,2	fine	16,4	21,3	45	75	0,060	50
10254202023	Black	28,5	fine	22,9	28,4	55	100	0,100	50
10254202029	Black	34,5	fine	28,8	34,4	65	120	0,120	25
10254202036	Black	42,5	fine	36,1	42,3	90	150	0,150	25
10254202048	Black	54,5	fine	47,8	54,3	100	190	0,210	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.