


ROHRflex PA 6

ROHRflex corrugated plastic tubings

Protective all-plastic tubing, internally and externally corrugated, fine or coarse profile, standard, for almost all applications, VO (UL 94), EN 45545-2 (HL3)

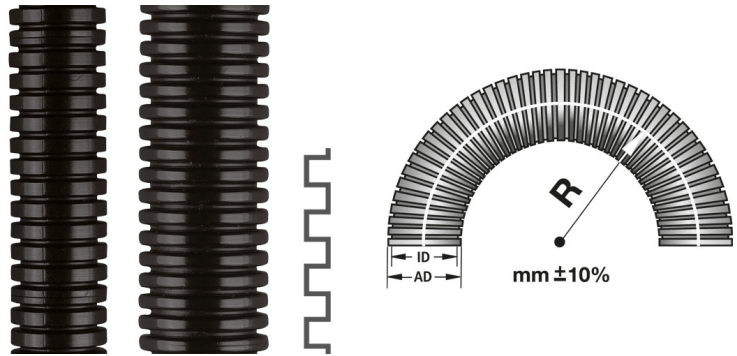

Temperature: -40°C ... +120°C ^ +150°C

Material: PA 6 plastics

IP class [acc. to EN 60529]: IP 68 | IP 69K

CHARACTERISTICS:

- Properties: air- and liquid-tight
- oil resistant up to +80°C
- benzine resistant
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- self-extinguishing
- flame retardant
- UV-resistant

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations



FLEXA No.	Colour	OD [mm]	Profile	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
10233202006	Black	10,0	fine	6,5	10,0	13	35	0,020	50
10233202010	Black	13,0	fine	10,0	13,0	20	45	0,030	50
10233202012	Black	15,8	fine	12,0	15,8	35	55	0,035	50
10233202014	Black	18,5	fine	14,3	18,5	40	65	0,045	50
10233202016	Black	21,2	fine	16,5	21,2	45	75	0,060	50
10233202023	Black	28,5	fine	23,0	28,5	55	100	0,100	50
10233202029	Black	34,5	fine	29,0	34,5	65	120	0,125	25
10233202036	Black	42,5	fine	36,0	42,5	90	150	0,150	25
10233202048	Black	54,5	fine	48,0	54,5	100	190	0,220	25
10233232016	Black	21,2	coarse	15,5	21,2	45	75	0,060	50
10233232023	Black	28,5	coarse	22,0	28,5	55	100	0,090	50
10233232029	Black	34,5	coarse	27,5	34,5	65	120	0,115	25
10233232036	Black	42,5	coarse	35,5	42,5	90	150	0,130	25
10233232048	Black	54,5	coarse	47,0	54,5	100	190	0,200	25
10233201006	Grey	10,0	fine	6,5	10,0	13	35	0,020	50
10233201010	Grey	13,0	fine	10,0	13,0	20	45	0,030	50
10233201012	Grey	15,8	fine	12,0	15,8	35	55	0,035	50
10233201014	Grey	18,5	fine	14,3	18,5	40	65	0,045	50
10233201016	Grey	21,2	fine	16,5	21,2	45	75	0,060	50
10233201023	Grey	28,5	fine	23,0	28,5	55	100	0,100	50



FLEXA No.	Colour	OD [mm]	Profile	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
10233201029	Grey	34,5	fine	29,0	34,5	65	120	0,125	25
10233201036	Grey	42,5	fine	36,0	42,5	90	150	0,150	25
10233201048	Grey	54,5	fine	48,0	54,5	100	190	0,220	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.