


## PH12

## Guide chains and accessories

Plastic guide chains, highly stressable, economical, easy to mount, compatible connections, simple handling with standard tools, Ha - Outer height 108 mm, Hi - Inner height 80 mm, T - Pitch 125 mm

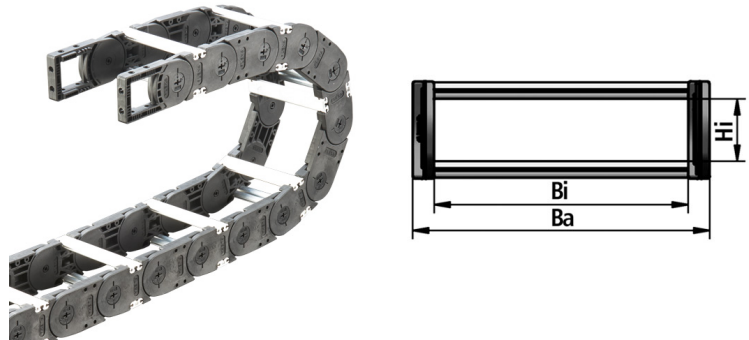

**Temperature:** -40°C ... +135°C

**Material:** link plates: PA6 GFK  
plastics, frame bar:  
aluminium

**APPLICATIONS:**

- Application: automation / [special-purpose] machines / plant construction / doors / elevators

**CHARACTERISTICS:**

- Properties: easy to mount
- economical
- designed for extended lifetime
- inner and outer widths up to approx. 600 mm available
- compatible connections
- simple handling with standard tools



FLEXA No.	Article	Bi [mm]	R [mm]	Ba [mm]	Bow length [mm]	Max. quant. separators	Weight [kg/m]	PU [m]
16096100015	PH12-100A-15F	100,0	150	142,0	600	5	4,880	1
16096100020	PH12-100A-20F	100,0	200	142,0	800	5	4,880	1
16096100025	PH12-100A-25F	100,0	250	142,0	1000	5	4,880	1
16096100030	PH12-100A-30F	100,0	300	142,0	1200	5	4,880	1
16096100050	PH12-100A-50F	100,0	500	142,0	2000	5	4,880	1
16096150015	PH12-150A-15F	150,0	150	192,0	600	8	5,110	1
16096150020	PH12-150A-20F	150,0	200	192,0	800	8	5,110	1
16096150025	PH12-150A-25F	150,0	250	192,0	1000	8	5,110	1
16096150030	PH12-150A-30F	150,0	300	192,0	1200	8	5,110	1
16096150050	PH12-150A-50F	150,0	500	192,0	2000	8	5,110	1
16096200015	PH12-200A-15F	200,0	150	242,0	600	11	5,330	1
16096200020	PH12-200A-20F	200,0	200	242,0	800	11	5,330	1
16096200025	PH12-200A-25F	200,0	250	242,0	1000	11	5,330	1
16096200030	PH12-200A-30F	200,0	300	242,0	1200	11	5,330	1
16096200050	PH12-200A-50F	200,0	500	242,0	2000	11	5,330	1
16096250015	PH12-250A-15F	250,0	150	292,0	600	13	5,560	1
16096250020	PH12-250A-20F	250,0	200	292,0	800	13	5,560	1
16096250025	PH12-250A-25F	250,0	250	292,0	1000	13	5,560	1
16096250030	PH12-250A-30F	250,0	300	292,0	1200	13	5,560	1
16096250050	PH12-250A-50F	250,0	500	292,0	2000	13	5,560	1
16096300015	PH12-300A-15F	300,0	150	342,0	600	16	5,780	1
16096300020	PH12-300A-20F	300,0	200	342,0	800	16	5,780	1



FLEXA No.	Article	Bi [mm]	R [mm]	Ba [mm]	Bow length [mm]	Max. quant. separators	Weight [kg/m]	PU [m]
16096300025	PH12-300A-25F	300,0	250	342,0	1000	16	5,780	1
16096300030	PH12-300A-30F	300,0	300	342,0	1200	16	5,780	1
16096300050	PH12-300A-50F	300,0	500	342,0	2000	16	5,780	1
16096350015	PH12-350A-15F	350,0	150	392,0	600	19	6,000	1
16096350020	PH12-350A-20F	350,0	200	392,0	800	19	6,000	1
16096350025	PH12-350A-25F	350,0	250	392,0	1000	19	6,000	1
16096350030	PH12-350A-30F	350,0	300	392,0	1200	19	6,000	1
16096350050	PH12-350A-50F	350,0	500	392,0	2000	19	6,000	1

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.