


## PL3

Plastic guide chains, hinged, to be opened manually, quick and easy, loadable across entire inner chain width, Ha - Outer Height 22 mm, Hi - Inner height 18 mm, T - Pitch 32 mm

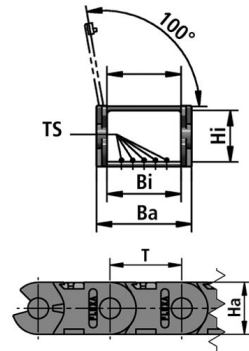

**Temperature:** -40°C ... +135°C

**Material:** PA6 GFK plastics

### CHARACTERISTICS:

- Properties: hinged to be opened manually - quick and easy
- optimized wall thickness
- interior ratio
- economical
- extended lifetime
- loadable across entire inner chain width
- delivered in sections of 1 meter [standard]

### APPLICATIONS:

- Application: automation / [special-purpose] machines / plant construction / doors / elevators



FLEXA No.	Article	Bi [mm]	R [mm]	Ba [mm]	Bow length [mm]	Max. quant. separators	Weight [kg/m]	PU [m]
16023031003	PL3-31-3F	31,0	35	41,0	140	4	0,350	1
16023031005	PL3-31-5F	31,0	50	41,0	200	4	0,350	1
16023031007	PL3-31-7F	31,0	70	41,0	280	4	0,350	1
16023031010	PL3-31-10F	31,0	100	41,0	400	4	0,350	1

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.