


## PL4

Plastic guide chains, hinged, to be opened manually, quick and easy, loadable across entire inner chain width, Ha - Outer Height 30 mm, Hi - Inner height 25 mm, T - Pitch 45 mm

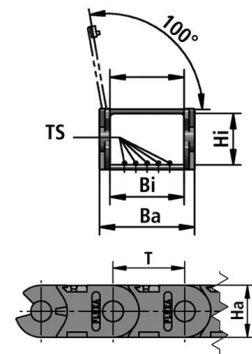

**Temperature:** -40°C ... +135°C

**Material:** PA6 GFK plastics

### CHARACTERISTICS:

- Properties: hinged to be opened manually - quick and easy
- optimized wall thickness
- interior ratio
- economical
- extended lifetime
- loadable across entire inner chain width
- delivered in sections of 1 meter [standard]

### APPLICATIONS:

- Application: automation / [special-purpose] machines / plant construction / doors / elevators



FLEXA No.	Article	Bi [mm]	R [mm]	Ba [mm]	Bow length [mm]	Max. quant. separators	Weight [kg/m]	PU [m]
16024038005	PL4-38-5F	38,0	50	50,0	200	3	0,500	1
16024038007	PL4-38-7F	38,0	75	50,0	300	3	0,500	1
16024038010	PL4-38-10F	38,0	100	50,0	400	3	0,500	1
16024038015	PL4-38-15F	38,0	150	50,0	600	3	0,500	1
16024038020	PL4-38-20F	38,0	200	60,0	800	3	0,500	1
16024048005	PL4-48-5F	48,0	50	60,0	200	5	0,530	1
16024048007	PL4-48-7F	48,0	75	60,0	300	5	0,530	1
16024048010	PL4-48-10F	48,0	100	60,0	400	5	0,530	1
16024048015	PL4-48-15F	48,0	150	60,0	600	5	0,530	1
16024048020	PL4-48-20F	48,0	200	50,0	800	5	0,530	1
16024068005	PL4-68-5F	68,0	50	80,0	200	7	0,590	1
16024068007	PL4-68-7F	68,0	75	80,0	300	7	0,590	1
16024068010	PL4-68-10F	68,0	100	80,0	400	7	0,590	1
16024068015	PL4-68-15F	68,0	150	80,0	600	7	0,590	1
16024068020	PL4-68-20F	68,0	200	80,0	800	7	0,590	1
16024083005	PL4-83-5F	83,0	50	95,0	200	9	0,630	1
16024083007	PL4-83-7F	83,0	75	95,0	300	9	0,630	1
16024083010	PL4-83-10F	83,0	100	95,0	400	9	0,630	1
16024083015	PL4-83-15F	83,0	150	95,0	600	9	0,630	1
16024083020	PL4-83-20F	83,0	200	95,0	800	9	0,630	1
16024113005	PL4-113-5F	113,0	50	125,0	200	13	0,700	1
16024113007	PL4-113-7F	113,0	75	125,0	300	13	0,700	1



<b>FLEXA No.</b>	<b>Article</b>	<b>Bi [mm]</b>	<b>R [mm]</b>	<b>Ba [mm]</b>	<b>Bow length [mm]</b>	<b>Max. quant. separators</b>	<b>Weight [kg/m]</b>	<b>PU [m]</b>
16024113010	PL4-113-10F	113,0	100	125,0	400	13	0,700	1
16024113015	PL4-113-15F	113,0	150	125,0	600	13	0,700	1
16024113020	PL4-113-20F	113,0	200	125,0	800	13	0,700	1

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.