


ROHRflex PP

ROHRflex corrugated plastic tubings

Protective all-plastic tubing, internally and externally corrugated, fine profile, fine profile, very flexible, for economic applications, HB (UL 94), very good UV-resistant

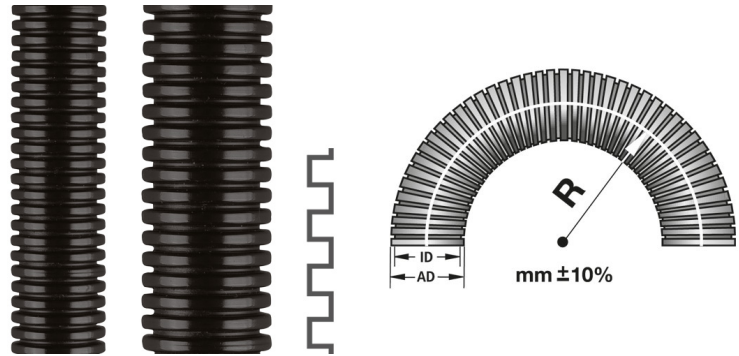

Temperature: -40°C ... +120°C ^ +150°C

Material: PP plastics

IP class [acc. to EN 60529]: IP 68 | IP 69K

CHARACTERISTICS:

- Properties: air- and liquid-tight
- resistant against hydrous solutions, acids and alkalis
- widely resistant to solvents
- free of silicone, cadmium, halogen
- ozon resistant
- very good UV-resistant
- flame retardant

APPLICATIONS:

- Application: machine and plant constructions / automotive / shipbuilding / automation / electrical installations



FLEXA No.	Colour	OD [mm]	Profile	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
10231002006	Black	10,0	fine	6,9	9,9	15	45	0,010	50
10231002010	Black	13,0	fine	9,8	12,9	20	60	0,020	50
10231002012	Black	15,8	fine	12,2	15,7	25	75	0,035	50
10231002014	Black	18,5	fine	14,3	18,2	35	105	0,040	50
10231002016	Black	21,2	fine	16,6	21,2	40	120	0,050	50
10231002023	Black	28,5	fine	23,0	28,4	45	135	0,090	50
10231002029	Black	34,5	fine	28,9	34,3	55	165	0,110	25
10231002036	Black	42,5	fine	36,0	42,5	65	195	0,160	25
10231002048	Black	54,5	fine	48,0	54,5	80	240	0,210	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.