




PSL-VA

Special protective conduits

Special protective conduit for the medical-, sensor technology and the beam wave guide technology, helix made of stainless steel, fiber glass braiding, silicone rubber sheathing

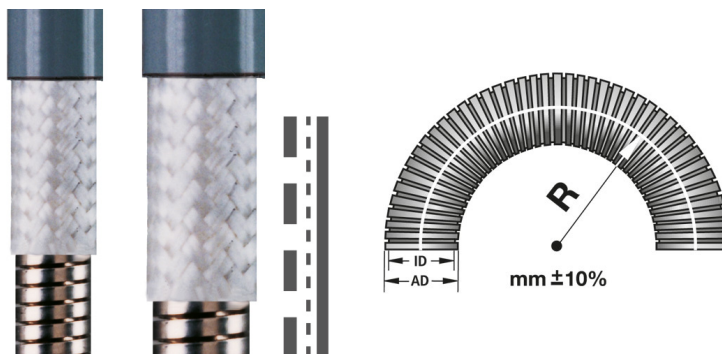

Temperature: -50°C ... +180°C

Material: stainless steel V2A | Braiding: fiber glass | Sheathing: silicone-rubber

IP class [acc. to EN 60529]: IP 68

APPLICATIONS:

- Application: opto-electronics / medical technology / beam wave guide technology / technical endoscopy / measuring instruments / sensor technology

CHARACTERISTICS:

- Properties: flexible
- stretch resistant
- air- and liquid-tight
- temperature resistant
- low flammability
- no appearance of toxic and corrosive fire gases
- widely resistant to solvents and chemicals
- free of halogen and cadmium



FLEXA No.	Colour	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
10133901003	Grey	3,3	5,3	10	25	0,030	*
10133901013	Grey	3,8	5,8	12	30	0,035	*
10133901014	Grey	4,5	6,5	15	40	0,040	*
10133901005	Grey	5,0	7,0	20	50	0,045	*
10133901006	Grey	6,5	8,9	25	65	0,065	*
10133901018	Grey	7,2	9,6	25	65	0,075	*
10133901007	Grey	7,7	10,1	30	75	0,180	*

*in production length

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.