

## ROHRflex PU

## ROHRflex corrugated plastic tubings

Protective all-plastic tubing, internally and externally corrugated, fine or coarse profile, for very flexible applications, oil and fuel resistant, HB (UL 94)


**Temperature:** -40°C ... +120°C ^ +150°C

**Material:** PU plastics

**IP class [acc. to EN 60529]:** IP 68 | IP 69K

## CHARACTERISTICS:

- Properties: air- and liquid-tight
- oil, benzine and grease resistant
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- high tenacity and abrasion resistance
- outstanding qualities at low temperatures
- very flexible
- microbe resistant
- UV-resistant

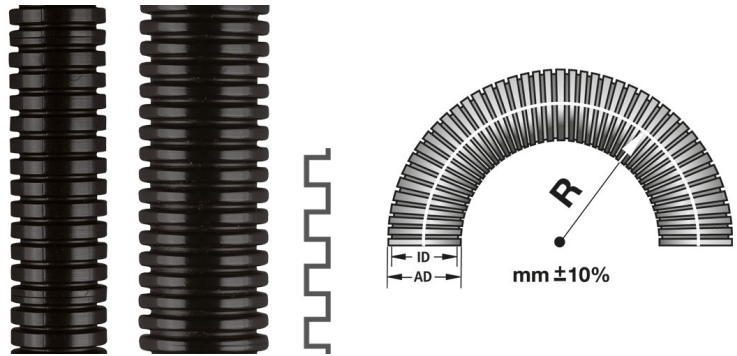

## APPLICATIONS:

- Application: machine and plant constructions / automotive especially for engine installations / shipbuilding / automation / electrical installations



FLEXA No.	Colour	OD [mm]	Profile	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
10289902010	Black	13,0	fine	8,8	13,0	15	40	0,040	50
10289902012	Black	15,8	fine	11,4	15,8	22	55	0,050	50
10289932016	Black	21,2	coarse	15,2	21,2	35	75	0,060	50
10289932023	Black	28,5	coarse	22,0	28,5	45	100	0,140	50
10289932029	Black	34,5	coarse	27,5	34,5	50	120	0,165	25
10289932036	Black	42,5	coarse	35,5	42,5	80	150	0,170	25
10289932048	Black	54,5	coarse	47,0	54,5	100	190	0,230	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.