

RQB1 45-N | NPT thread


Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, bend 45°, NPT outer thread, integrated snap-in sleeve, conically sealed

Temperature: -40°C ... +120°C

Material: PA plastics

IP class [acc. to EN 60529]: IP 66

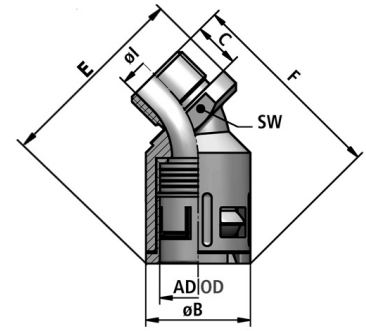

APPLICATIONS:

- Application: machine and plant constructions / automotive / automation / electrical installations



FLEXA No.	Colour	OD [mm]	thread size NPT	Ø I [mm]	Ø B [mm]	C [mm]	E [mm]	F [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15701015205	Black	15,8	1/2 inch	10,0	23,0	12,0	44,5	52,5	24	1,200	50
15701021205	Black	21,2	1/2 inch	14,5	29,5	12,0	55,0	60,0	26	1,900	50
15701028214	Black	28,5	3/4 inch	20,0	37,0	13,0	67,0	70,0	32	2,700	25
15701034210	Black	34,5	1 inch	30,0	44,0	14,0	73,5	75,0	39	3,800	10
15701042217	Black	42,5	1 1/4 inch	39,0	52,0	17,0	82,5	100,0	48	5,400	10
15701054209	Black	54,5	1 1/2 inch	37,5	64,0	17,0	97,0	100,0	59	8,900	5

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.