




RQB90-N | NPT thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, bend 90°, NPT outer thread, integrated snap-in sleeve with sealing, high density




Temperature:	-40°C ... +120°C
Material:	PA plastics
IP class [acc. to EN 60529]:	IP 68   IP 69K

**APPLICATIONS:**  
 - Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

**CHARACTERISTICS:**

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen

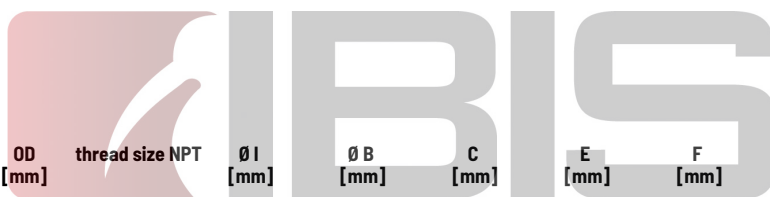

FLEXA No.	Colour	OD [mm]	thread size NPT	Ø I [mm]	Ø B [mm]	C [mm]	E [mm]	F [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15703013204	Black	13,0	3/8"	8,5	20,0	12,0	56,5	40,0	21	1,320	50
15020018204	Black	15,8	3/8"	10,0	23,0	12,0	59,5	45,0	24	1,550	50
15703015205	Black	15,8	1/2 inch	10,0	23,0	12,0	59,5	45,0	24	1,670	50
15020018206	Black	21,2	1/2 inch	13,0	29,5	12,0	72,5	48,0	26	2,170	50
15020018214	Black	28,5	3/4 inch	17,0	37,0	13,0	87,5	62,5	32	3,410	25
15020018216	Black	34,5	1 inch	23,0	44,0	13,5	95,5	73,0	39	4,850	10
15703042217	Black	52,0	1 1/4 inch	31,5	52,0	17,0	103,5	82,5	48	6,900	10
15020018209	Black	54,5	1 1/2 inch	35,5	64,0	17,0	116,0	96,0	59	9,490	5
15703054238	Black	54,5	2 inch	45,5	64,0	15,5	122,0	96,0	70	10,460	5

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.