


## RQBK45-M | metric thread

## Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, bend 45°, metric nickel-plated brass outer thread, integrated snap-in sleeve with sealing, high density, incl. O-ring (OR) and flat sealing (FRH), EN 45545-2 (HL3)

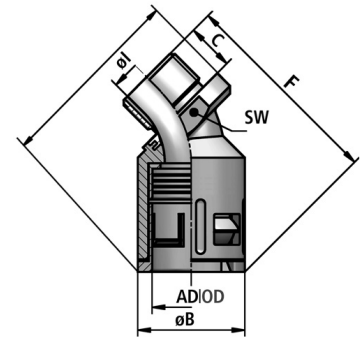

<b>Temperature:</b>	-40°C ... +120°C
<b>Material:</b>	PA plastics   nickel-plated brass 58
<b>IP class [acc. to EN 60529]:</b>	IP 68   IP 69K

## APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

## CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- fit for high mechanical stress
- impact-resistant
- high torque of thread connection




ELECTRO-PRODUCTS CORP.

FLEXA No.	Colour	OD [mm]	Thread type	Ø I [mm]	Ø B [mm]	C [mm]	E [mm]	F [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15102010212	Black	10,0	M12 x 1,5	6,5	18,0	10,0	39,0	45,0	18	1,140	50
15102013216	Black	13,0	M16 x 1,5	8,5	22,0	12,0	42,5	48,0	21	1,760	50
15102015220	Black	15,8	M20 x 1,5	10,0	25,5	12,0	44,5	52,5	24	1,700	50
15102021220	Black	21,2	M20 x 1,5	13,0	29,5	12,0	55,0	60,0	26	2,540	50
15102021225	Black	21,2	M25 x 1,5	14,5	29,5	13,0	56,0	60,0	26	3,800	50
15102028225	Black	28,5	M25 x 1,5	17,0	37,0	13,0	64,0	72,0	32	4,000	25
15102028232	Black	28,5	M32 x 1,5	20,0	38,0	14,0	64,0	75,0	37	5,640	25
15102034232	Black	34,5	M32 x 1,5	23,0	44,0	14,0	73,5	76,0	39	6,700	10
15102034240	Black	34,5	M40 x 1,5	29,0	47,0	14,0	73,5	77,0	46	9,000	10
15102042240	Black	42,5	M40 x 1,5	31,5	56,5	17,0	82,5	86,0	48	8,700	10
15102042250	Black	42,5	M50 x 1,5	36,0	61,5	17,0	82,5	86,0	59	16,500	10
15102054250	Black	54,5	M50 x 1,5	35,5	64,0	17,0	92,0	95,0	59	17,400	5
15102054263	Black	54,5	M63 x 1,5	45,5	71,5	17,0	97,0	100,0	69	22,500	5

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.