


RQBK45-P | PG thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, bend 45°, PG nickel-plated brass outer thread, integrated snap-in sleeve with sealing, high density, incl. O-ring (OR) and flat sealing (FRH), EN 45545-2 (HL3)

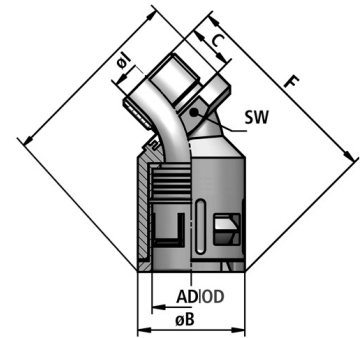

Temperature: -40°C ... +120°C

Material: PA plastics |
nickel-plated brass 58


IP class [acc. to EN 60529]: IP 68 | IP 69K

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- fit for high mechanical stress
- impact-resistant
- high torque of thread connection

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

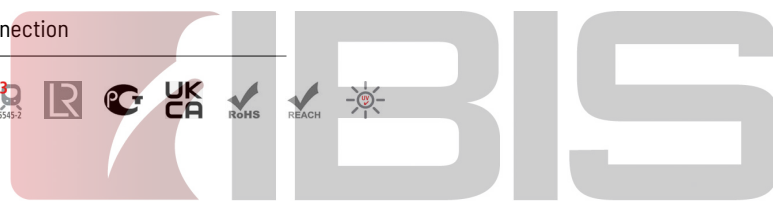ELECTRO-PRODUCTS CORP.

FLEXA No.	Colour	OD [mm]	Thread type	Ø I [mm]	Ø B [mm]	C [mm]	E [mm]	F [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15020087209	Black	13,0	PG9	8,5	22,0	12,0	42,5	48,0	21	1,700	50
15020087211	Black	15,8	PG11	10,0	25,5	12,0	44,5	52,5	24	2,300	50
15020087213	Black	18,5	PG13,5	12,5	28,0	12,0	49,0	59,0	27	2,620	50
15020087216	Black	21,2	PG16	14,5	29,5	13,0	56,0	60,0	26	2,860	50
15020087221	Black	28,5	PG21	20,0	38,0	14,0	64,0	75,0	36	5,360	25
15020087229	Black	34,5	PG29	29,0	47,0	14,0	73,5	77,0	45	7,700	10
15020087236	Black	42,5	PG36	36,0	61,5	17,0	82,5	86,0	58	12,300	10
15020087248	Black	54,5	PG48	45,5	71,5	17,0	97,0	100,0	70	18,500	5

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.