


RQBK90-N | NPT thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, bend 90°, NPT nickel-plated brass outer thread, integrated snap-in sleeve, with sealing, high density, incl. O-ring (OR) and flat sealing (FRH), EN 45545-2 (HL3)

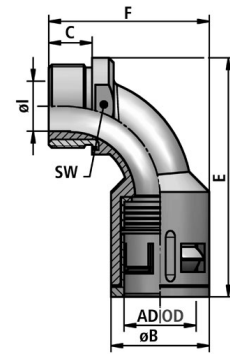

Temperature: -40°C ... +120°C

Material: PA plastics | nickel-plated brass 58


IP class [acc. to EN 60529]: IP 68 | IP 69K

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- fit for high mechanical stress
- impact-resistant
- high torque of thread connection

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

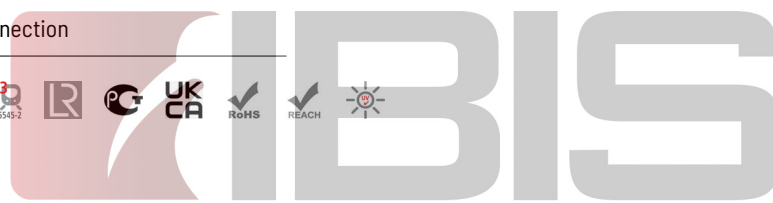ELECTRO-PRODUCTS CORP.

FLEXA No.	Colour	OD [mm]	thread size NPT	Ø I [mm]	Ø B [mm]	C [mm]	E [mm]	F [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15020022205	Black	15,8	1/2 inch	10,0	23,0	12,0	62,0	45,0	24	3,000	50
15020022206	Black	21,2	1/2 inch	13,0	29,5	12,0	73,0	48,0	26	3,000	50
15020022214	Black	28,5	3/4 inch	17,0	37,0	14,0	85,0	64,0	22	5,100	25
15020022216	Black	34,5	1 inch	24,5	44,0	14,0	100,5	74,0	31	8,000	10
15020022217	Black	42,5	1 1/4 inch	31,5	52,0	17,0	111,0	82,5	36	12,000	10
15020022209	Black	54,5	1 1/2 inch	37,5	64,0	17,0	124,5	97,0	60	18,000	5
15020022210	Black	54,5	2 inch	45,5	64,0	17,0	124,5	97,0	70	18,300	5

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.