


RQBK90-P | PG thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, bend 90°, PG nickel-plated brass outer thread, integrated snap-in sleeve, with sealing, high density, incl. O-ring (OR) and flat sealing (FRH), EN 45545-2 (HL3)

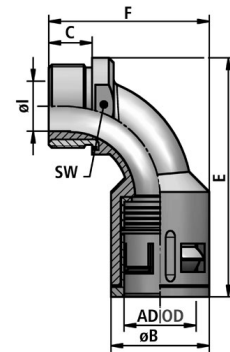


Temperature:	-40°C ... +120°C
Material:	PA plastics nickel-plated brass 58
IP class [acc. to EN 60529]:	IP 68 IP 69K

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- fit for high mechanical stress
- impact-resistant
- high torque of thread connection

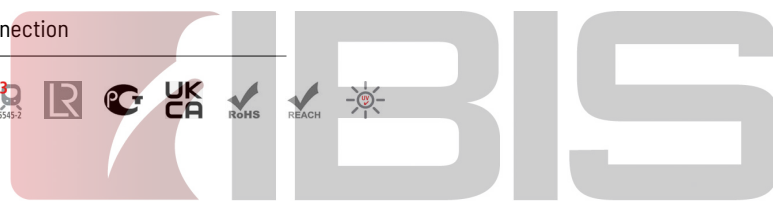ELECTRO-PRODUCTS CORP.

FLEXA No.	Colour	OD [mm]	Thread type	Ø I [mm]	Ø B [mm]	C [mm]	E [mm]	F [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15020088207	Black	10,0	PG7	6,5	17,0	10,0	57,0	39,0	18	1,340	50
15020088209	Black	13,0	PG9	8,5	20,0	12,0	59,0	40,5	21	1,920	50
15020088211	Black	15,8	PG11	10,0	23,0	12,0	62,0	45,0	24	2,640	50
15020088213	Black	18,5	PG13,5	12,5	25,0	12,0	65,0	47,0	27	2,860	50
15020088216	Black	21,2	PG16	14,5	29,5	13,0	73,0	48,0	26	3,080	50
15020088221	Black	28,5	PG21	20,0	37,0	14,0	85,0	64,0	36	5,760	25
15020088229	Black	34,5	PG29	29,0	44,0	14,0	100,5	74,0	46	8,000	10
15020088236	Black	42,5	PG36	36,0	52,0	17,0	111,0	82,5	58	14,800	10
15020088248	Black	54,5	PG48	45,5	64,0	17,0	124,5	97,0	70	21,800	5

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.