


### RQBK90DR-M | metric thread

#### Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, bend 90°, metric turnable nickel-plated brass outer thread, integrated snap-in sleeve, with sealing, high density, incl. O-ring (OR) and flat sealing (FRH), EN 45545-2 (HL3)

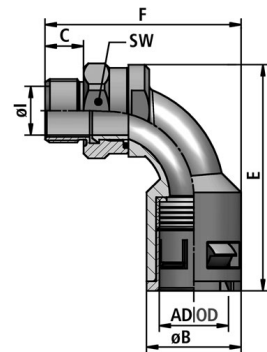

**Temperature:** -40°C ... +120°C

**Material:** PA plastics | nickel-plated brass 58

**IP class [acc. to EN 60529]:** IP 68 | IP 69K

#### CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- fit for high mechanical stress
- impact-resistant
- high torque of thread connection
- swiveling also after installation

#### APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations



**BIBIS**  
ELECTRO-PRODUCTS CORP.

FLEXA No.	Colour	OD [mm]	Thread type	Ø I [mm]	Ø B [mm]	C [mm]	E [mm]	F [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15121021220	Black	21,2	M20 x 1,5	13,0	29,5	12,0	72,0	62,0	27	6,200	50
15121421220	Black	21,2	M20 x 1,5	13,0	29,5	6,0	72,0	56,0	27	5,740	50
15121028225	Black	28,5	M25 x 1,5	17,0	37,0	13,0	90,0	80,0	34	11,060	25
15121428225	Black	28,5	M25 x 1,5	17,0	37,0	7,0	90,0	74,0	34	10,350	25
15121034232	Black	34,5	M32 x 1,5	24,5	44,0	14,0	100,0	91,0	43	16,500	10
15121434232	Black	34,5	M32 x 1,5	24,5	44,0	8,0	100,0	85,0	43	15,500	10
15121042240	Black	42,5	M40 x 1,5	31,5	52,0	17,0	111,00	103,0	52	28,400	10
15121442240	Black	42,5	M40 x 1,5	31,5	52,0	8,0	111,0	94,0	52	26,300	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.