




RQBK90DR-N | NPT thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, bend 90°, NPT turnable nickel-plated brass outer thread, integrated snap-in sleeve, with sealing, high density, incl. O-ring (OR) and flat sealing (FRH), EN 45545-2 (HL3)

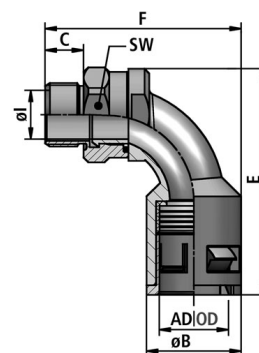

Temperature:	-40°C ... +120°C
Material:	PA plastics nickel-plated brass 58
IP class [acc. to EN 60529]:	IP 68 IP 69K

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- fit for high mechanical stress
- impact-resistant
- high torque of thread connection
- swiveling also after installation



FLEXA No.	Colour	OD [mm]	thread size NPT	Ø I [mm]	Ø B [mm]	C [mm]	E [mm]	F [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15020019206	Black	21,2	Other	13,0	29,5	13,0	73,0	65,0	27	7,100	50
15020019214	Black	28,5	Other	17,0	37,0	14,0	90,0	81,5	34	12,000	25
15020019216	Black	34,5	Other	24,5	44,0	14,0	100,0	95,0	43	17,400	10
15020019217	Black	42,5	Other	31,5	52,0	17,0	110,0	105,0	52	30,500	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.