

## RQG-C | CTG thread

## Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, straight, CTG outer thread, integrated snap-in sleeve with sealing, high density


**Temperature:** -40°C ... +120°C

**Material:** PA plastics

**IP class [acc. to EN 60529]:** IP 68 | IP 69K

## CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen

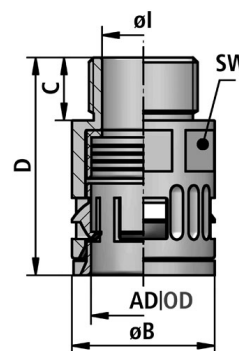

## APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations



FLEXA No.	Colour	OD [mm]	Thread type	ø I [mm]	ø B [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15020052212	Black	13,0	CTG 1/4"	9,0	20,0	10,0	35,0	18	0,520	50
15020052209	Black	13,0	CTG 3/8"	10,0	21,0	10,0	35,0	18	0,500	50
15020052201	Black	13,0	CTG G16 1/2"	13,0	27,0	14,0	39,5	18	0,660	50
15020052210	Black	15,8	CTG 3/8"	12,5	23,0	10,0	37,0	21	0,640	50
15020052202	Black	15,8	CTG G16 1/2"	12,5	27,0	13,5	41,5	21	0,760	50
15020052203	Black	21,2	CTG G 16 1/2"	16,0	29,5	13,0	44,5	27	1,140	50
15020052204	Black	28,5	CTG G 22 3/4"	20,5	37,0	13,0	48,0	34	1,720	25
15020052205	Black	34,5	CTG G 28 1"	25,5	44,0	16,0	52,0	40	2,280	25
15020052206	Black	42,5	CTG G 36 1 1/4"	35,0	52,0	18,0	59,0	60	3,080	25
15020052211	Black	54,5	CTG 1 1/2"	39,0	40,0	16,5	55,5	70	4,400	10
15020052207	Black	54,5	CTG G 54 2"	49,0	64,0	16,5	55,5	70	4,500	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.