

RQG-P | PG thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, straight, PG outer thread, integrated snap-in sleeve with sealing, high density


Temperature: -40°C ... +120°C

Material: PA plastics

IP class [acc. to EN 60529]: IP 68 | IP 69K

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen

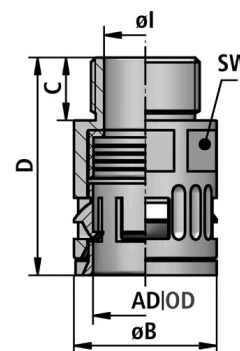

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations



FLEXA No.	OD [mm]	Colour	Thread type	ø I [mm]	ø B [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15020026207	10,0	Black	PG7	7,0	17,0	10,0	32,5	16	0,400	50
15020027202	10,0	Black	PG9	7,0	17,0	10,0	32,5	16	0,420	50
15020027203	10,0	Black	PG11	7,0	21,0	10,0	32,5	16	0,480	50
15020027205	10,0	Black	PG13,5	7,0	23,0	10,0	32,5	16	0,520	25
15020027201	13,0	Black	PG7	8,0	20,0	10,0	35,0	18	0,500	50
15020026209	13,0	Black	PG9	10,0	20,0	10,0	35,0	18	0,500	50
15020027204	13,0	Black	PG11	10,0	21,0	10,0	35,0	18	0,540	50
15020027206	13,0	Black	PG13,5	10,0	23,0	10,0	35,0	18	0,600	25
15020026211	15,8	Black	PG11	12,5	23,0	10,0	37,0	21	0,700	50
15020027207	15,8	Black	PG13,5	12,5	23,0	10,0	37,0	21	0,700	50
15020027210	15,8	Black	PG16	12,5	26,5	10,0	37,0	21	0,760	25
15020026213	18,5	Black	PG13,5	13,5	26,0	13,0	43,0	24	0,860	50
15020026214	18,5	Black	PG16	17,0	25,5	11,0	42,0	24	0,960	25
15020027209	21,2	Black	PG13,5	15,5	29,5	10,0	43,5	27	1,200	10
15020026216	21,2	Black	PG16	17,0	29,5	13,0	46,0	27	1,200	50
15020027208	28,5	Black	PG16	17,0	37,0	12,0	48,5	34	1,800	10
15020026221	28,5	Black	PG21	23,5	37,0	12,5	48,5	34	1,680	25
15020026229	34,5	Black	PG29	30,0	44,0	14,5	51,0	40	2,360	25
15020026236	42,5	Black	PG36	36,0	63,0	17,0	76,0	60	6,000	25
15020026248	54,5	Black	PG48	47,5	64,0	17,0	88,0	70	9,200	10
15020026007	10,0	Grey	PG7	7,0	17,0	10,0	32,5	16	0,400	50



FLEXA No.	OD [mm]	Colour	Thread type	Ø I [mm]	Ø B [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15020027002	10,0	Grey	PG9	7,0	18,5	10,0	32,5	16	0,420	50
15020027003	10,0	Grey	PG11	7,0	21,0	10,0	32,5	16	0,480	50
15020027005	10,0	Grey	PG13,5	7,0	23,0	10,0	32,5	16	0,520	25
15020027001	13,0	Grey	PG7	8,0	20,0	10,0	35,0	18	0,500	50
15020026009	13,0	Grey	PG9	10,0	20,0	10,0	35,0	18	0,500	50
15020027004	13,0	Grey	PG11	10,0	21,0	10,0	35,0	18	0,540	50
15020027006	13,0	Grey	PG13,5	10,0	23,0	10,0	35,0	18	0,600	25
15020026011	15,8	Grey	PG11	12,5	23,0	10,0	37,0	21	0,700	50
15020027007	15,8	Grey	PG13,5	12,5	23,0	10,0	37,0	21	0,700	50
15020027010	15,8	Grey	PG16	12,5	26,5	10,0	37,0	21	0,760	25
15020026013	18,5	Grey	PG13,5	13,5	26,0	13,0	43,0	24	0,860	50
15020026014	18,5	Grey	PG16	17,0	25,5	11,0	42,0	24	0,960	25
15020027009	21,2	Grey	PG13,5	15,5	29,5	10,0	43,5	27	1,200	10
15020026016	21,2	Grey	PG16	17,0	29,5	13,0	46,0	27	1,200	50
15020027008	28,5	Grey	PG16	17,0	37,0	12,0	48,5	34	1,800	10
15020026021	28,5	Grey	PG21	23,5	37,0	12,5	48,5	34	1,680	25
15020026029	34,5	Grey	PG29	30,0	44,0	14,5	51,0	40	2,360	25
15020026036	42,5	Grey	PG36	36,0	53,0	17,0	76,0	60	6,000	25
15020026048	54,5	Grey	PG48	47,5	74,0	17,0	88,0	70	9,200	10



Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.