


RQG1-P | PG thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, straight, PG outer thread, integrated snap-in sleeve, conically sealed

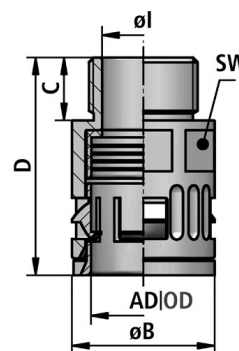

Temperature: -40°C ... +120°C

Material: PA plastics

IP class [acc. to EN 60529]: IP 66

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen

APPLICATIONS:

- Application: machine and plant constructions / automotive / shipbuilding / automation / electrical installations



FLEXA No.	OD [mm]	Colour	Thread type	ϕI [mm]	ϕB [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15020049207	10,0	Black	PG7	7,0	17,0	10,0	32,5	16	0,420	50
15020063202	10,0	Black	PG9	7,0	18,5	10,0	32,5	16	0,420	50
15020063203	10,0	Black	PG11	7,0	21,0	10,0	32,5	16	0,480	50
15020063205	10,0	Black	PG13,5	7,0	23,0	10,0	32,5	16	0,560	25
15020062201	13,0	Black	PG7	8,0	20,0	10,0	35,0	18	0,520	50
15020049209	13,0	Black	PG9	10,0	20,0	10,0	35,0	18	0,520	50
15020063204	13,0	Black	PG11	10,0	21,0	10,0	35,0	18	0,560	50
15020063206	13,0	Black	PG13,5	10,0	23,0	10,0	35,0	18	0,600	25
15020049211	15,8	Black	PG11	12,5	23,0	10,0	37,0	21	0,700	50
15020063207	15,8	Black	PG13,5	12,5	23,0	10,0	37,0	21	0,720	25
15020063210	15,8	Black	PG16	12,5	26,5	10,0	37,0	21	0,800	25
15020049213	18,5	Black	PG13,5	13,5	26,0	13,0	43,0	24	0,880	50
15020062209	21,2	Black	PG13,5	15,4	29,5	13,0	43,5	27	1,200	10
15020049216	21,2	Black	PG16	17,0	29,5	13,0	46,0	27	1,240	50
15020062208	28,5	Black	PG16	17,0	37,0	12,0	48,5	34	1,800	10
15020049221	28,5	Black	PG21	23,5	37,0	13,0	48,5	34	1,680	25
15020049229	34,5	Black	PG29	30,0	44,0	14,5	53,5	40	2,400	25
15020049236	42,5	Black	PG36	36,5	51,5	14,5	56,0	48	3,120	25
15020049248	54,5	Black	PG48	48,0	65,5	15,5	58,0	59	4,400	10
15020049007	10,0	Grey	PG7	7,0	17,0	10,0	32,5	16	0,420	50
15020049009	13,0	Grey	PG9	10,0	20,0	10,0	35,0	18	0,520	50



FLEXA No.	OD [mm]	Colour	Thread type	Ø I [mm]	Ø B [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15020049011	15,8	Grey	PG11	12,5	23,0	10,0	37,0	21	0,700	50
15020049013	18,5	Grey	PG13,5	13,5	26,0	13,0	43,0	24	0,880	50
15020049016	21,2	Grey	PG16	17,0	29,5	13,0	46,0	27	1,240	50
15020049021	28,5	Grey	PG21	23,5	37,0	13,0	48,5	34	1,680	25
15020049029	34,5	Grey	PG29	30,0	44,0	14,5	53,5	40	2,400	25
15020049036	42,5	Grey	PG36	36,5	51,5	14,5	56,0	48	3,120	25
15020049048	54,5	Grey	PG48	48,0	65,5	15,5	58,0	59	4,400	10



Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.