

RQG1-S

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, straight, plug-type connection, conically sealed

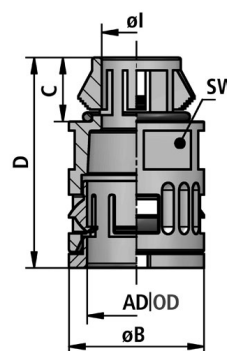
Temperature: -40°C ... +120°C

Material: PA plastics

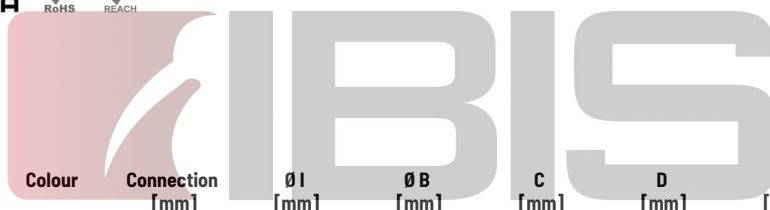
IP class [acc. to EN 60529]: IP 66

CHARACTERISTICS:

- Properties: for quick assembly without counternut
- for wall thicknesses from 1.0 to 2.5 mm
- resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen


APPLICATIONS:

- Application: machine and plant constructions / automation / electrical installations

FLEXA No.	OD [mm]	Colour	Connection [mm]	Ø I [mm]	Ø B [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15020082207	10,0	Black	12,0	7,0	17,0	11,7	34,5	16	0,440	50
15020382212	13,0	Black	12,0	9,0	20,0	12,0	37,0	18	0,600	50
15020082209	13,0	Black	15,0	10,0	20,0	13,6	38,6	18	0,600	50
15020382216	15,8	Black	16,0	11,8	23,0	13,5	40,5	21	0,700	50
15020082211	15,8	Black	18,0	12,5	23,0	13,5	40,5	21	0,760	50
15020382220	21,2	Black	20,0	15,2	29,5	13,8	45,3	27	1,100	50
15020082216	21,2	Black	22,0	18,0	29,5	13,8	45,3	27	1,240	50
15020082221	28,5	Black	28,0	23,5	37,0	17,9	51,9	34	2,320	25
15020382225	28,5	Black	25,0	21,0	37,0	17,5	51,0	34	1,920	25
15020082229	34,5	Black	37,0	30,5	44,0	18,7	54,7	40	2,480	25
15020082236	42,5	Black	47,0	36,5	52,0	21,0	60,0	49	2,700	25
15020382250	54,5	Black	50,0	43,0	64,0	21,0	63,0	59	3,700	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.