



RQG2-P | PG thread


Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, straight, PG inner thread, integrated snap-in sleeve with sealing, high density

Temperature:	-40°C ... +120°C
Material:	PA plastics
IP class [acc. to EN 60529]:	IP 68 IP 69K


CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen

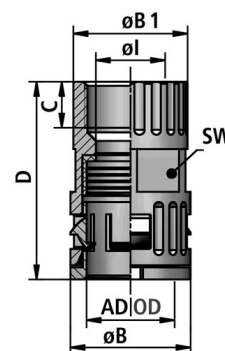

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

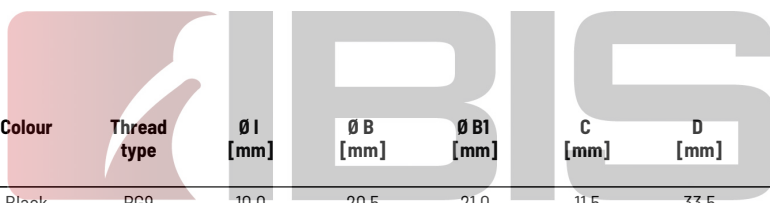

FLEXA No.	OD [mm]	Colour	Thread type	Ø l [mm]	Ø B [mm]	Ø B1 [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15020081209	13,0	Black	PG9	10,0	20,5	21,0	11,5	33,5	18	0,680	50
15020081211	15,8	Black	PG11	12,5	23,0	23,0	15,0	39,5	21	1,000	50
15020081216	21,2	Black	PG16	17,0	29,5	27,5	16,0	45,0	27	1,380	50
15020081221	28,5	Black	PG21	23,5	37,0	33,5	22,0	49,0	34	2,040	25
15020081229	34,5	Black	PG29	30,5	44,0	41,0	18,0	52,0	40	2,600	10
15020081236	42,5	Black	PG36	36,5	58,0	52,0	20,0	91,0	55	6,800	10
15020081248	54,5	Black	PG48	45,0	68,0	64,0	16,0	90,0	65	9,200	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.