


RQGK-M | metric thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, straight, metric nickel-plated brass outer thread, integrated snap-in sleeve with sealing, high density, EN 45545-2 (HL3), incl. O-ring (OR) and flat sealing (FRH)

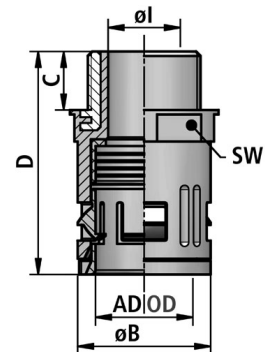

Temperature: -40°C ... +120°C

Material: PA plastics | nickel-plated brass 58

IP class [acc. to EN 60529]: IP 68 | IP 69K

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- fit for high mechanical stress
- impact-resistant
- high torque of thread connection



RIBIS

ELECTRO-PRODUCTS CORP.

FLEXA No.	OD [mm]	Colour	Thread type	ø I [mm]	ø B [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15107010212	10,0	Black	M12 x 1,5	7,0	20,0	10,0	38,5	18	1,080	50
15107410212	10,0	Black	M12 x 1,5	7,0	20,0	5,0	33,5	18	0,800	50
15107013212	13,0	Black	M12 x 1,5	7,0	24,0	10,0	40,0	22	1,500	50
15107413212	13,0	Black	M12 x 1,5	7,0	24,0	5,0	35,0	22	1,500	50
15107013216	13,0	Black	M16 x 1,5	8,5	25,0	12,0	42,0	23	1,660	50
15107413216	13,0	Black	M16 x 1,5	8,5	25,0	5,0	35,0	23	1,500	50
15107015216	15,8	Black	M16 x 1,5	10,0	27,0	12,0	42,5	25	1,940	50
15107415216	15,8	Black	M16 x 1,5	10,0	27,0	5,0	36,5	25	1,800	50
15107015220	15,8	Black	M20 x 1,5	11,0	29,0	12,0	43,5	27	2,020	50
15107415220	15,8	Black	M20 x 1,5	11,0	29,0	6,0	37,5	27	1,695	50
15107021220	21,2	Black	M20 x 1,5	15,0	29,5	12,0	48,0	28	2,360	50
15107421220	21,2	Black	M20 x 1,5	15,0	29,5	6,0	44,0	28	2,000	50
15107021225	21,2	Black	M25 x 1,5	16,0	34,0	13,0	49,0	32	3,240	25
15107421225	21,2	Black	M25 x 1,5	16,0	34,0	7,0	44,0	32	2,300	25
15107028225	28,5	Black	M25 x 1,5	18,0	44,0	19,0	54,0	35	3,840	25
15107428225	28,5	Black	M25 x 1,5	18,0	37,0	7,0	47,0	35	3,200	25
15107028232	28,5	Black	M32 x 1,5	20,0	41,0	14,0	54,0	39	5,080	25
15107428232	28,5	Black	M32 x 1,5	20,0	41,0	8,0	48,0	39	4,000	25
15107034232	34,5	Black	M32 x 1,5	24,0	44,0	14,0	57,0	42	5,760	25
15107434232	34,5	Black	M32 x 1,5	24,0	44,0	8,0	52,0	42	4,800	25
15107034240	34,5	Black	M40 x 1,5	27,5	50,0	17,0	64,0	48	6,000	25
15107434240	34,5	Black	M40 x 1,5	27,5	50,0	8,0	55,0	48	5,400	25



FLEXA No.	OD [mm]	Colour	Thread type	Ø I [mm]	Ø B [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15107042240	42,5	Black	M40 x 1,5	32,0	58,0	17,0	76,0	55	9,050	10
15107442240	42,5	Black	M40 x 1,5	32,0	58,0	8,0	67,0	55	7,700	10
15107042250	42,5	Black	M50 x 1,5	37,5	63,0	17,0	76,0	60	14,500	10
15107442250	42,5	Black	M50 x 1,5	37,5	63,0	9,0	68,0	60	13,700	10
15107054250	54,5	Black	M50 x 1,5	39,0	68,0	17,0	88,0	65	14,500	10
15107454250	54,5	Black	M50 x 1,5	39,0	68,0	9,0	80,0	65	15,000	10
15107054263	54,5	Black	M63 x 1,5	49,0	74,0	17,0	88,0	70	23,000	10
15107454263	54,5	Black	M63 x 1,5	49,0	74,0	10,0	81,0	70	22,700	10



Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.