


## RQGK-P | PG thread

## Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, straight, PG nickel-plated brass outer thread, integrated snap-in sleeve with sealing, high density, EN 45545-2 (HL3), incl. O-ring (OR) and flat sealing (FRH)

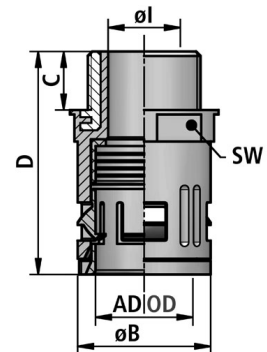

**Temperature:** -40°C ... +120°C

**Material:** PA plastics |  
nickel-plated brass 58


**IP class [acc. to EN 60529]:** IP 68 | IP 69K

## APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

## CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- fit for high mechanical stress
- impact-resistant
- high torque of thread connection

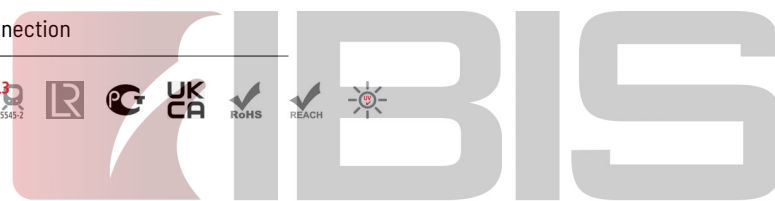ELECTRO-PRODUCTS CORP.

FLEXA No.	OD [mm]	Colour	Thread type	Ø l [mm]	Ø B [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15020074207	10,0	Black	PG7	7,0	20,0	10,0	38,0	18	0,980	50
15020074209	13,0	Black	PG9	8,5	24,0	12,0	42,0	22	1,580	50
15020074211	15,8	Black	PG11	11,0	27,0	12,0	44,0	25	2,200	50
15020074213	18,5	Black	PG13,5	12,5	29,0	12,0	47,5	26	2,300	50
15020074216	21,2	Black	PG16	16,0	33,0	13,0	51,0	31	2,680	25
15020074221	28,5	Black	PG21	20,0	41,0	14,0	55,0	39	5,000	25
15020074229	34,5	Black	PG29	27,5	48,0	14,0	59,0	46	7,200	25
15020074236	42,5	Black	PG36	36,0	63,0	17,0	76,0	60	13,100	10
15020074248	54,5	Black	PG48	47,5	74,0	17,0	68,0	70	20,400	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.