


## RQ GK2-M | metric thread

## Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, straight, metric nickel-plated brass inner thread, integrated snap-in sleeve with sealing, high density, EN 45545-2 (HL3)

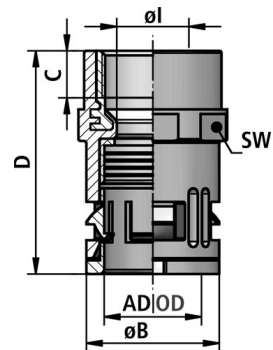

<b>Temperature:</b>	-40°C ... +120°C
<b>Material:</b>	PA plastics   nickel-plated brass 58
<b>IP class [acc. to EN 60529]:</b>	IP 68   IP 69K

## APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

## CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- fit for high mechanical stress
- impact-resistant
- high torque of thread connection



# IBIS

## ELECTRO-PRODUCTS CORP

FLEXA No.	OD [mm]	Colour	Thread type	ø I [mm]	ø B [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15108010212	10,0	Black	M12 x 1,5	7,0	20,0	7,5	38,5	18	1,500	50
15108013216	13,0	Black	M16 x 1,5	8,5	24,0	9,0	42,0	22	2,420	50
15108015220	15,8	Black	M20 x 1,5	11,0	27,0	9,0	43,5	25	3,140	50
15108021220	21,2	Black	M20 x 1,5	15,0	33,0	11,0	50,0	30	4,800	25
15108021225	21,2	Black	M25 x 1,5	16,0	33,0	11,0	50,0	31	2,600	25
15108028225	28,5	Black	M25 x 1,5	18,0	43,0	11,0	53,0	41	5,080	25
15108028232	28,5	Black	M32 x 1,5	20,0	43,0	13,0	53,0	41	5,900	25
15108034232	34,5	Black	M32 x 1,5	24,0	48,0	13,0	57,0	46	6,880	25
15108034240	34,5	Black	M40 x 1,5	27,5	49,0	16,0	60,0	46	6,300	25
15108042240	42,5	Black	M40 x 1,5	32,0	58,0	16,0	62,0	55	10,000	10
15108042250	42,5	Black	M50 x 1,5	36,0	60,0	18,0	95,5	55	11,000	10
15108054250	54,5	Black	M50 x 1,5	39,0	68,0	15,0	95,0	65	17,000	10
15108054263	54,5	Black	M63 x 1,5	47,5	79,0	17,0	95,5	65	18,600	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.