


RQGKZ-M | metric thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, straight, metric nickel-plated brass outer thread, integrated snap-in sleeve with sealing, strain relief, high density, EN 45545-2 (HL3)

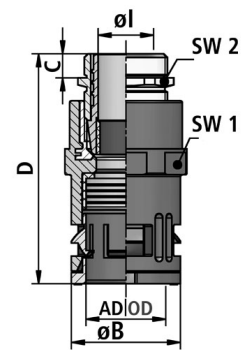

Temperature: -40°C ... +120°C

Material: PA plastics | nickel-plated brass 58

IP class [acc. to EN 60529]: IP 68 | IP 69K

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- fit for high mechanical stress
- impact-resistant
- high torque of thread connection
- optimal held and sealing of cables at the same time

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations



To ensure a high protection system between cable gland insert and screw connector housing it is necessary to use a sealing compound. (please see our assembly instructions)

IBIS
ELECTRO-PRODUCTS CORP.

FLEXA No.	OD [mm]	Colour	Thread type	Clamp.range [mm]	Ø1 [mm]	ØB [mm]	C [mm]	D [mm]	WS1 [mm]	WS2 [mm]	Weight [kg/100]	PU [pcs.]
15110010212	10,0	Black	M12 x 1,5	3,0-5,3	6,5	20,0	5,0	51,0	18	14	2,200	50
15110013216	13,0	Black	M16 x 1,5	5,0-8,5	8,5	24,0	5,0	55,0	22	17	3,330	50
15110015220	15,8	Black	M20 x 1,5	7,5-10,0	11,0	27,0	6,0	61,0	25	22	4,920	50
15110021220	21,2	Black	M20 x 1,5	10,0-12,5	12,5	33,0	6,0	64,0	30	22	6,470	25
15110021225	21,2	Black	M25 x 1,5	9,0-16,0	15,5	33,0	7,0	69,0	31	27	6,780	25
15110028225	28,5	Black	M25 x 1,5	11,0-16,0	16,0	42,8	7,0	71,0	41	27	6,720	25
15110028232	28,5	Black	M32 x 1,5	12,0-16,0	20,0	42,8	8,0	73,0	41	34	10,120	25
15110034232	34,5	Black	M32 x 1,5	14,5-20,5	21,0	48,0	8,0	79,0	46	34	11,200	25
15110034240	34,5	Black	M40 x 1,5	19,0-20,5	27,0	48,0	8,0	79,0	46	43	15,830	25
15110042240	42,5	Black	M40 x 1,5	21,0-26,0	27,0	57,3	8,0	106,0	55	43	18,960	10
15110042250	42,5	Black	M50 x 1,5	25,0-35,0	35,5	60,0	9,0	110,0	55	55	28,880	10
15110054250	54,5	Black	M50 x 1,5	25,0-35,0	35,5	68,0	9,0	122,0	65	55	31,470	10
15110054263	54,5	Black	M63 x 1,5	32,0-41,5	41,5	73,0	10,0	124,0	65	65	39,460	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.