




RQGZ-M | metric thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, straight, metric outer thread, integrated snap-in sleeve with sealing, strain relief, high density

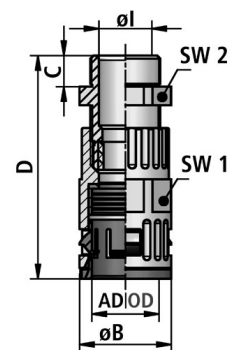


Temperature:	-40°C ... +120°C
Material:	PA plastics
IP class [acc. to EN 60529]:	IP 68 IP 69K

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- optimal held and sealing of cables at the same time

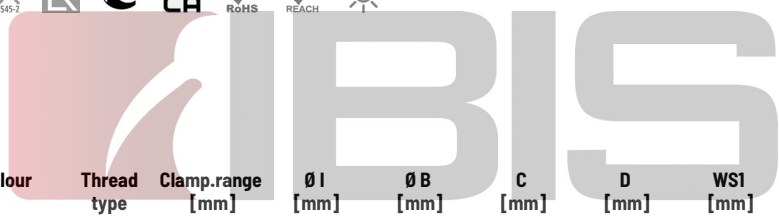

FLEXA No.	OD [mm]	Colour	Thread type	Clamp.range [mm]	Ø I [mm]	Ø B [mm]	C [mm]	D [mm]	WS1 [mm]	WS2 [mm]	Weight [kg/100]	PU [pcs.]
15020031212	10,0	Black	M12 x 1,5	4,0-6,5	6,5	17,0	8,0	51,0	16	15	0,800	20
15020031216	13,0	Black	M16 x 1,5	5,0-9,5	9,5	20,0	8,0	53,0	18	20	1,300	20
15020031217	15,8	Black	M16 x 1,5	5,0-9,5	10,5	23,0	8,0	60,0	21	20	1,500	20
15020031220	15,8	Black	M20 x 1,5	8,0-11,0	12,0	23,0	8,0	59,0	21	24	1,500	20
15020031223	18,5	Black	M20 x 1,5	8,0-11,0	12,0	27,0	8,0	59,0	24	24	1,700	20
15020031222	21,2	Black	M20 x 1,5	8,0-11,0	12,0	29,5	8,0	68,0	27	24	1,800	10
15020031225	21,2	Black	M25 x 1,5	11,0-16,0	16,0	33,5	8,0	70,0	27	29	3,000	10
15020031228	28,5	Black	M25 x 1,5	11,0-17,0	17,0	37,0	8,0	82,0	34	39	3,200	10
15020031232	28,5	Black	M32 x 1,5	15,0-21,0	18,0	37,0	10,0	82,0	34	36	3,800	10
15020031240	34,5	Black	M40 x 1,5	16,0-26,0	25,0	44,0	10,0	85,0	40	46	5,700	10
15020031250	42,5	Black	M50 x 1,5	27,0-35,0	32,0	58,0	12,0	141,0	55	55	11,200	10
15020031263	54,5	Black	M63 x 1,5	32,0-42,0	44,0	68,0	12,0	145,0	65	68	16,270	10
15020031012	10,0	Grey	M12 x 1,5	4,0-6,5	6,5	17,0	8,0	51,0	16	15	0,800	20
15020031016	13,0	Grey	M16 x 1,5	5,0-9,5	9,5	20,0	8,0	53,0	18	20	1,300	20
15020031017	15,8	Grey	M16 x 1,5	5,0-9,5	10,5	23,0	8,0	60,0	21	20	1,500	20
15020031020	15,8	Grey	M20 x 1,5	8,0-11,0	12,0	23,0	8,0	59,0	21	24	1,500	20
15020031023	18,5	Grey	M20 x 1,5	8,0-11,0	12,0	27,0	8,0	59,0	24	24	1,700	20
15020031022	21,2	Grey	M20 x 1,5	8,0-11,0	12,0	29,5	8,0	68,0	27	24	1,800	10
15020031025	21,2	Grey	M25 x 1,5	11,0-16,0	16,0	33,5	8,0	70,0	27	29	3,000	10
15020031028	28,5	Grey	M25 x 1,5	11,0-17,0	16,0	37,0	8,0	82,0	34	29	3,200	10
15020031032	28,5	Grey	M32 x 1,5	15,0-21,0	18,0	37,0	10,0	82,0	34	36	3,800	10



FLEXA No.	OD [mm]	Colour	Thread type	Clamp.range [mm]	Ø I [mm]	Ø B [mm]	C [mm]	D [mm]	WS1 [mm]	WS2 [mm]	Weight [kg/100]	PU [pcs.]
15020031040	34,5	Grey	M40 x 1,5	16,0-26,0	25,0	44,0	10,0	85,0	40	46	5,700	10
15020031050	42,5	Grey	M50 x 1,5	27,0-35,0	32,0	58,0	12,0	141,0	55	55	11,200	10
15020031063	54,5	Grey	M63 x 1,5	32,0-42,0	44,0	68,0	12,0	145,0	65	68	16,270	10



Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.