

RQGZ-S

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector with strain relief, quick-type, straight, plug-type connection, high density


Temperature: -40°C ... +120°C

Material: PA plastics

IP class [acc. to EN 60529]: IP 68

CHARACTERISTICS:

- Properties: smallest outer dimensions to be used under confined conditions
- for quick assembly without counternut
- for wall thicknesses from 1.0 to 4.0 mm
- self-extinguishing
- fit for high mechanical stress
- free of silicone, cadmium, halogen

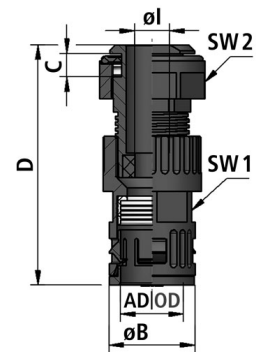

APPLICATIONS:

- Application: machine and plant constructions / automation / electrical installations



FLEXA No.	OD [mm]	Colour	Clamp.range [mm]	Bohrung ø [mm]	ø l [mm]	ø B [mm]	C [mm]	D [mm]	WS1 [mm]	WS2 [mm]	Weight [kg/100]	PU [pcs.]
15130013216	13,0	Black	5,0-10,0	16,2	6,0	27,0	8,5	65,0	18	24	1,700	20
15130015220	15,8	Black	8,0-13,0	20,2	8,0	29,0	8,5	90,0	21	26	2,160	20
15130021225	21,2	Black	11,0-17,0	25,2	11,0	36,0	8,5	81,0	27	32	3,820	10
15130028232	28,5	Black	15,0-21,0	32,2	15,0	46,0	11,0	72,0	34	42	5,950	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.