


RQGZ1-M | metric thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, straight, metric outer thread, integrated snap-in sleeve, strain relief, conically sealed



Temperature: -40°C ... +120°C

Material: PA plastics


IP class [acc. to EN 60529]: IP 66

APPLICATIONS:

- Application: machine and plant constructions / automotive / automation / electrical installations

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- optimal held and sealing of cables at the same time

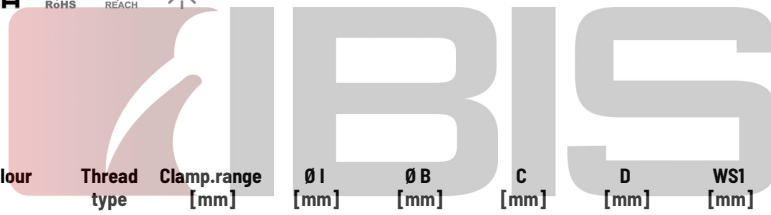FLEXA No.	OD [mm]	Colour	Thread type	Clamp.range [mm]	Ø I [mm]	Ø B [mm]	C [mm]	D [mm]	WS1 [mm]	WS2 [mm]	Weight [kg/100]	PU [pcs.]
15109010212	10,0	Black	M12 x 1,5	4,0-6,5	6,5	17,0	8,0	51,0	16	15	0,800	20
15109013216	13,0	Black	M16 x 1,5	5,0-9,5	9,5	20,0	8,0	53,0	18	20	1,300	20
15109015220	15,8	Black	M20 x 1,5	8,0-11,0	13,0	23,0	8,0	59,0	21	24	1,550	20
15109021225	21,2	Black	M25 x 1,5	11,0-16,0	16,0	33,5	8,0	70,0	27	29	3,100	10
15109028225	28,5	Black	M25 x 1,5	11,0-16,0	16,0	37,0	8,0	82,0	34	29	3,200	10
15109028232	28,5	Black	M32 x 1,5	15,0-21,0	18,0	37,0	10,0	82,0	34	36	3,800	10
15109034240	34,5	Black	M40 x 1,5	16,0-26,0	25,0	44,0	10,0	85,0	40	46	5,800	10
15109042250	42,5	Black	M50 x 1,5	27,0-35,0	32,0	58,0	12,0	104,0	49	55	9,000	10
15109054263	54,5	Black	M63 x 1,5	32,0-42,0	44,0	68,0	12,0	139,0	60	68	11,800	10
15109010012	10,0	Grey	M12 x 1,5	4,0-6,5	6,5	17,0	8,0	51,0	16	15	0,800	20
15109013016	13,0	Grey	M16 x 1,5	5,0-9,5	9,5	20,0	8,0	53,0	18	20	1,300	20
15109015020	15,8	Grey	M20 x 1,5	8,0-11,0	13,0	23,0	8,0	59,0	21	24	1,550	20
15109021025	21,2	Grey	M25 x 1,5	16,0-33,5	16,0	33,5	8,0	70,0	27	29	3,100	10
15109028025	28,5	Grey	M25 x 1,5	11,0-16,0	16,0	37,0	8,0	82,0	34	29	3,200	10
15109028032	28,5	Grey	M32 x 1,5	15,0-21,0	18,0	37,0	10,0	82,0	34	36	3,800	10
15109034040	34,5	Grey	M40 x 1,5	16,0-26,0	25,0	44,0	10,0	85,0	40	46	5,800	10
15109042050	42,5	Grey	M50 x 1,5	27,0-35,0	32,0	58,0	12,0	104,0	49	55	9,000	10
15109054063	54,5	Grey	M63 x 1,5	32,0-42,0	44,0	68,0	12,0	139,0	60	68	11,800	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.