

RQLG1-P | PG thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, straight, PG outer thread, integrated snap-in sleeve, conically sealed


Temperature: -40°C ... +120°C

Material: PA plastics

IP class [acc. to EN 60529]: IP 65

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- highly resistant to acids and solvents
- free of silicone, cadmium, halogen

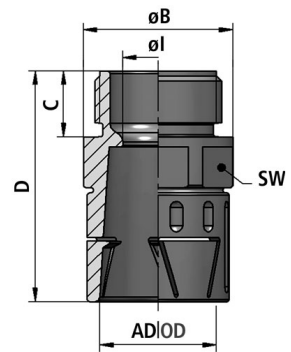

APPLICATIONS:

- Application: machine and plant constructions / automotive / automation / electrical installations



FLEXA No.	OD [mm]	Colour	Thread type	Ø I [mm]	Ø B [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15515010207	10,0	Black	PG7	7,0	17,0	12,0	34,5	16	0,500	50
15515013209	13,0	Black	PG9	10,0	20,0	12,0	37,0	18	0,600	50
15515015211	15,8	Black	PG11	12,5	24,0	12,0	38,0	22	0,800	50
15515018213	18,5	Black	PG13,5	14,0	26,0	13,0	40,0	27	1,000	50
15515021216	21,2	Black	PG16	14,0	29,5	13,0	45,5	27	1,200	50
15515028221	28,5	Black	PG21	18,8	36,0	15,0	49,0	35	1,700	25
15515034229	34,5	Black	PG29	26,0	44,0	15,0	54,0	43	2,700	25
15515042236	42,5	Black	PG36	35,0	52,0	16,0	61,0	53	4,300	25
15515054248	54,5	Black	PG48	45,0	64,0	16,0	68,0	66	5,900	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.