


## RQW-C | CTG thread

## Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, elbow 90°, CTG outer thread, integrated snap-in sleeve with sealing, high density



**Temperature:** -40°C ... +120°C

**Material:** PA plastics


**IP class [acc. to EN 60529]:** IP 68 | IP 69K

## CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen

## APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

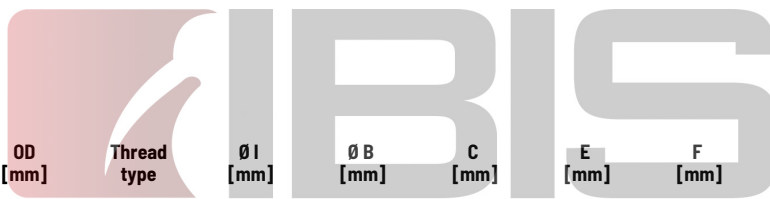

FLEXA No.	Colour	OD [mm]	Thread type	Ø I [mm]	Ø B [mm]	C [mm]	E [mm]	F [mm]	Ø D [mm]	Weight [kg/100]	PU [pcs.]
15020053201	Black	13,0	CTG G 16 / 1/2"	15,0	20,0	14,0	40,0	40,0	27,0	0,980	50
15020053202	Black	15,8	CTG G 16 / 1/2"	15,0	23,0	14,0	42,0	43,0	27,0	1,120	50
15020053203	Black	21,2	CTG G 16 / 1/2"	15,0	29,5	14,0	51,0	49,0	27,0	2,000	50
15020053204	Black	28,5	CTG G 22 / 3/4"	20,5	37,0	13,0	57,0	57,0	34,0	3,000	25
15020053205	Black	34,5	CTG G 28 / 1"	25,0	44,0	16,0	67,5	66,5	43,0	4,900	10
15020053206	Black	42,5	CTG G 36 / 1/4"	35,0	52,0	18,0	83,0	76,0	52,0	7,500	10
15020053207	Black	54,5	CTG G 54 / 2"	52,0	64,0	18,0	96,0	89,5	66,0	11,100	5

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.