



SPR-PVC

Protective metal conduits liquid tight

Protective metal conduit, strip-wound, s profile, PVC sheathing


Temperature: -25°C ... +90°C ^ +100°C

Material: cold strip galvanized | PVC

IP class [acc. to EN 60529]: IP 68

CHARACTERISTICS:

- Properties: weatherproof
- watertight
- widely resistant to seawater, acids and oils
- free of silicone and cadmium
- very flexible
- stretch-resistant
- compression-resistant

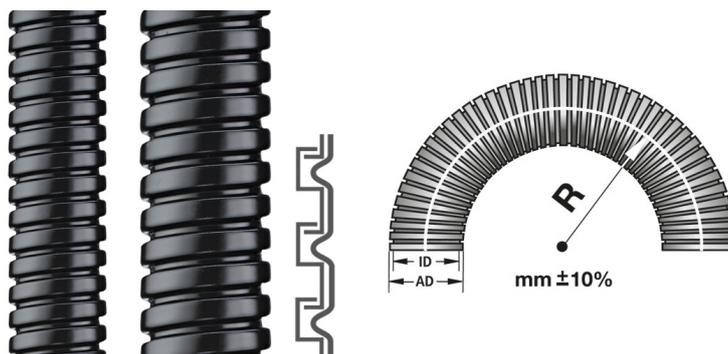

APPLICATIONS:

- Application: machine and plant constructions / shipbuilding / automation / electrical installations / sensor technology



| FLEXA No. | Colour | ID [mm] | OD [mm] | BR stat. [mm] | BR dyn. [mm] | Weight [kg/m] | PU [m] |
|-------------|--------|---------|---------|---------------|--------------|---------------|--------|
| 12010102004 | Black | 4,0 | 7,0 | 17 | 45 | 0,060 | 50 |
| 12010102005 | Black | 5,0 | 8,0 | 20 | 50 | 0,062 | 50 |
| 12010102006 | Black | 6,0 | 9,0 | 24 | 60 | 0,070 | 50 |
| 12010102009 | Black | 9,0 | 12,0 | 40 | 100 | 0,105 | 50 |

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.