

SPR-VA-PVC

Special protective conduits

Protective metal conduit for the medical and sensor technology, strip-wound, s profile, PVC sheathing, non flame propagating acc. to DIN EN IEC 61386-23


Temperature: -25°C ... +90°C ^ +100°C

Material: stainless steel | PVC

IP class [acc. to EN 60529]: IP 68

CHARACTERISTICS:

- Properties: weatherproof
- watertight
- widely resistant to seawater, acids and oils
- free of silicone and cadmium
- very flexible
- stretch-resistant
- compression-resistant

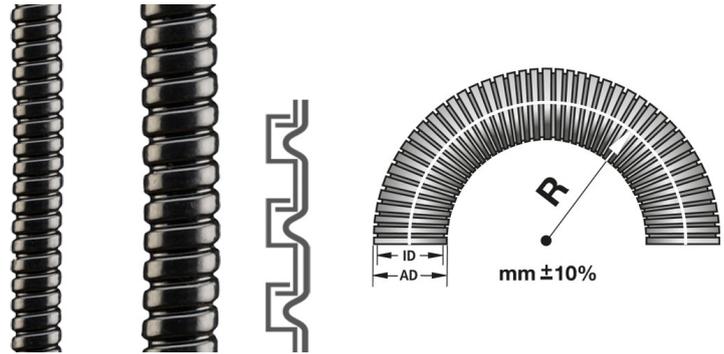

APPLICATIONS:

- Application: machine and plant constructions / automotive / shipbuilding / automation / electrical installations / opto-electronics / beam wave guide technology / technical endoscopy / sensor technology



FLEXA No.	Colour	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
12010182003	Black	3,0	6,0	15	37	0,040	50
12010182004	Black	4,0	7,0	17	45	0,050	50
12010182005	Black	5,0	8,0	20	50	0,060	50
12010182006	Black	6,0	9,0	25	60	0,080	50
12010182008	Black	8,0	11,0	35	90	0,090	50
12010182009	Black	9,0	12,0	38	100	0,105	50

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.