

USZ-M | metric thread**Connectors**

Metal connector, safety-type, straight, metric outer thread, strain relief, incl. ferrule [brass], sealing [TPE] and O-ring [NBR]

Temperature: -40°C ... +100°C

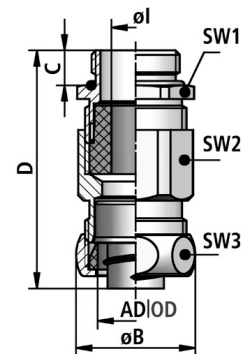
Material: nickel-plated brass

IP class [acc. to EN 60529]: IP 40

for protective conduit: SPR-AS / SPR-VA

CHARACTERISTICS:

- Properties: highly watertight and dustproof
- friction-type locking of conduit and screw connector
- correct grounding
- covering of the conduit ends
- vibration- and tensionproof

**APPLICATIONS:**

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

FLEXA No.	OD [mm]	Thread type	Clamp.range [mm]	Conduit ID	Conduit OD	Ø I [mm]	Ø B [mm]	C [mm]	D [mm]	WS1 [mm]	WS2 [mm]	WS3 [mm]	Weight [kg/100]	PU [pcs.]
15016327112	10,0	M12 x 1,5	5,0-6,5	8,0	10,0	6,5	19,0	10,0	43,0	15	16	17	2,090	10
15016327116	14,0	M16 x 1,5	6,0-10,5	11,0	14,0	9,0	23,0	10,0	48,0	18	21	21	4,070	10
15016327120	17,0	M20 x 1,5	8,0-14,5	14,0	17,0	12,5	27,0	10,0	48,0	24	24	25	5,390	10
15016327020	21,0	M20 x 1,5	8,0-14,5	18,0	21,0	16,0	31,0	10,0	49,0	24	29	29	6,990	10
15016327125	21,0	M25 x 1,5	12,5-19,0	18,0	21,0	16,0	31,0	11,0	54,0	30	30	29	7,210	10
15016327025	27,0	M25 x 1,5	12,5-19,0	23,0	27,0	21,0	31,0	11,0	61,0	30	36	36	13,200	10
15016327132	27,0	M32 x 1,5	17,0-25,5	23,0	27,0	21,0	39,0	13,0	65,0	36	36	36	14,650	10
15016327140	36,0	M40 x 1,5	24,0-33,0	31,0	36,0	27,5	48,0	13,0	68,0	46	46	45	23,870	5
15016327150	45,0	M50 x 1,5	33,0-42,0	40,0	45,0	35,0	57,0	14,0	74,0	55	55	54	31,150	5
15016327163	56,0	M63 x 1,5	40,0-52,0	51,0	56,0	45,0	70,0	14,0	81,0	70	70	66	34,000	5

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.