


## FLEXAzip

### ROHRflex corrugated plastic tubings

Protective all-plastic tubing, internally and externally corrugated, slitted - re-closable for additional installation, HB (UL 94)

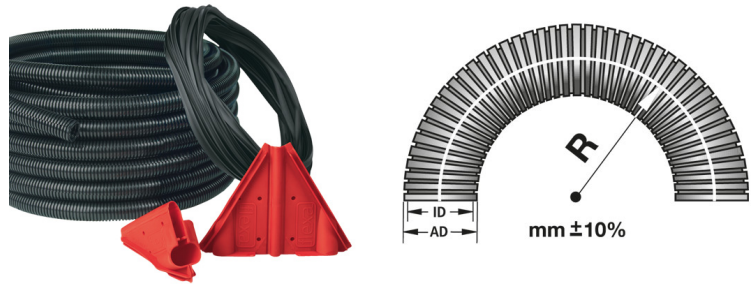

**Temperature:** -50°C ... +100°C ^ +130°C

**Material:** conduit: PA plastics | closing profile: TPE

**IP class [acc. to EN 60529]:** IP 40

#### CHARACTERISTICS:

- Properties: oil resistant up to + 80° C
- benzine resistant
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- self-extinguishing
- flame retardant
- UV-resistant

#### APPLICATIONS:

- Application: machine and plant constructions / shipbuilding / automation / electrical installations



FLEXA No.	Colour	OD [mm]	Profile	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
10255202110	Black	13,0	fine	9,8	12,9	20	60	0,030	10
10255202112	Black	15,8	fine	12,1	15,8	25	80	0,040	10
10255202116	Black	21,2	fine	16,5	21,3	40	120	0,060	10
10255202123	Black	28,5	fine	22,9	28,5	45	140	0,100	10
10255202129	Black	34,5	fine	28,6	34,4	55	170	0,120	10
10255202136	Black	42,5	fine	36,0	42,2	65	200	0,150	10
10255202148	Black	54,5	fine	47,7	54,2	80	240	0,210	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.