

## FLEXAgraff-AS


## Protective metal conduits

Protective metal conduit, strip-wound,  
double-overlapped profile (Agraff)

<b>Temperature:</b>	-50°C ... +250°C
<b>Material:</b>	cold strip galvanized
<b>IP class [acc. to EN 60529]:</b>	IP 40


## CHARACTERISTICS:

- Properties: high tensile and twisting strength
- no untwisting of the conduit
- very flexible
- high shielding factor
- approved acc. to DIN EN IEC 61386-23

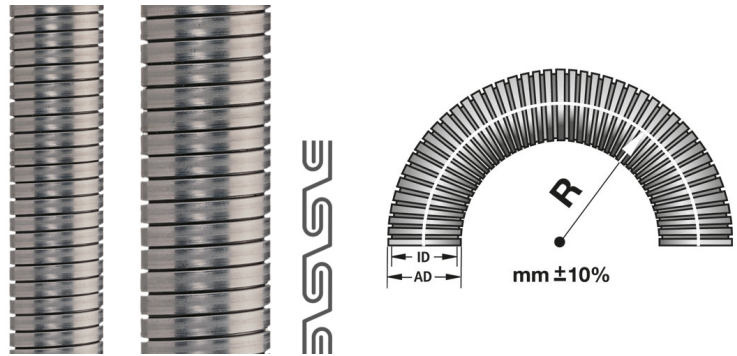

## APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations / ex-area acc to EN 1127-1

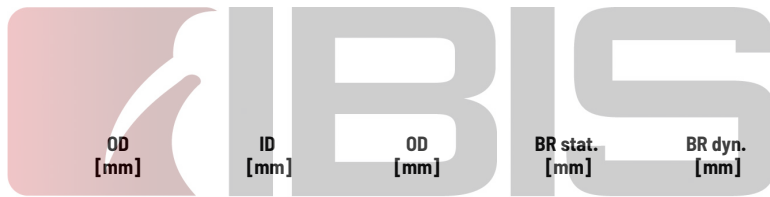

FLEXA No.	Colour	OD [mm]	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
11080101008	Stainless steel	10,0	8,0	10,0	40	100	0,090	50
11080101012	Stainless steel	14,0	12,0	14,0	50	125	0,155	50
11080101014	Stainless steel	17,0	14,0	17,0	60	150	0,240	50
11080101016	Stainless steel	19,0	16,0	19,0	67	170	0,290	50
11080101018	Stainless steel	21,0	18,0	21,0	70	175	0,290	50
11080101024	Stainless steel	27,0	24,0	27,0	90	225	0,380	50
11080101031	Stainless steel	36,0	31,0	36,0	130	325	0,640	25
11080101040	Stainless steel	45,0	40,0	45,0	150	375	0,840	25
11080101051	Stainless steel	56,0	51,0	56,0	210	525	1,100	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.