

FLEXAgraff-PU-AS

Protective metal conduits liquid tight

Protective metal conduit, strip-wound, double overlapped profile (Agraff), PU sheathing, V2 (UL 94)


Temperature: -50°C ... +100°C ^ +130°C

Material: cold strip galvanized | PU

IP class [acc. to EN 60529]: IP 68

CHARACTERISTICS:

- Properties: V2 according to UL 94
- high tensile and twisting strength
- resistant to oil, benzine and grease
- widely resistant to solvents and acids
- free of halogen, silicone, cadmium
- good performance at low temperatures
- no untwisting of the conduit
- very flexible
- high shielding factor
- microbe resistant
- flame-resistant
- approved acc. to DIN EN IEC 61386-23

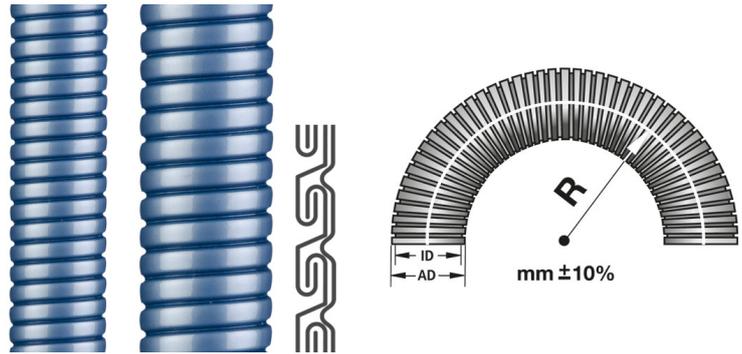

APPLICATIONS:

- Application: machine and plant constructions / automotive / shipbuilding / automation / electrical installations



IBIS
ELECTRO-PRODUCTS CORP.

FLEXA No.	Colour	OD [mm]	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
12130101007	Blue	10,0	7,0	10,0	35	90	0,110	50
12130101011	Blue	14,0	11,0	14,0	45	115	0,150	50
12130101013	Blue	17,0	13,0	17,0	50	125	0,260	50
12130101017	Blue	21,0	17,0	21,0	75	190	0,300	50
12130101023	Blue	27,0	23,0	27,0	115	290	0,440	50
12130101029	Blue	36,0	29,0	36,0	125	315	0,685	25
12130101038	Blue	45,0	38,0	45,0	175	440	0,960	25
12130101049	Blue	56,0	49,0	56,0	240	600	1,200	25
12131101007	Blue	10,0	7,0	10,0	35	90	0,110	10
12131101011	Blue	14,0	11,0	14,0	45	115	0,150	10
12131101013	Blue	17,0	13,0	17,0	50	125	0,260	10
12131101017	Blue	21,0	17,0	21,0	75	190	0,300	10
12131101023	Blue	27,0	23,0	27,0	115	290	0,440	10
12131101029	Blue	36,0	29,0	36,0	125	315	0,685	10
12131101038	Blue	45,0	38,0	45,0	175	440	0,960	10
12131101049	Blue	56,0	49,0	56,0	240	600	1,200	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.