


FLEXAgraff-PU-F

Protective metal conduits liquid tight

Protective metal conduit, strip-wound, double overlapped profile (Agraff), PU sheathing, flame retardant, V0 (UL 94), EN 45545-2 (R22;HL2), (R23;HL3)

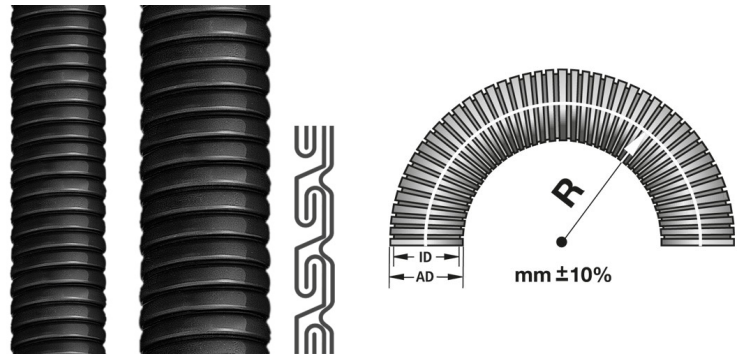

Temperature: -50°C ... +100°C ^ +130°C

Material: cold strip galvanized | PU

IP class [acc. to EN 60529]: IP 68

CHARACTERISTICS:

- Properties: V0 according to UL 94
- flame retardant
- self-extinguishing
- weatherproof
- widely resistant to seawater, acids and oils
- free of halogen, silicone, cadmium
- resistant to compression
- approved acc. to DIN EN IEC 61386-23 DIN 5510, part 2 EN 45545-HL3 NFF 16-101
- 102

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry - heavy mechanical load / shipbuilding / automation / electrical installations



IBIS
ELECTRO-PRODUCTS CORP.

FLEXA No.	Colour	OD [mm]	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
12133702007	Black	10,0	7,0	10,0	35	90	0,110	50
12133702011	Black	14,0	11,0	14,0	45	115	0,150	50
12133702013	Black	17,0	13,0	17,0	50	125	0,260	50
12133702017	Black	21,0	17,0	21,0	75	190	0,300	50
12133702023	Black	27,0	23,0	27,0	115	290	0,440	50
12133702029	Black	36,0	29,0	36,0	125	315	0,725	25
12133702038	Black	45,0	38,0	45,0	175	440	0,960	25
12133702049	Black	56,0	49,0	56,0	240	600	1,200	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.