


## GMK-N | for NPT threads

## Accessories

Counternut especially for NPT plastic threads

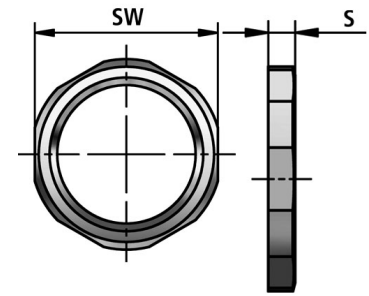

**Temperature:** -40 °C ... +100°C

**Material:** polyamide, fibre-glass reinforced

## CHARACTERISTICS:

- Properties: resistant against light acids and soft lyes
- resistant against sea water, benzine and mineral oil



FLEXA No.	Thread type	Colour	S [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
10316000202	NPT 3/8"	Black	5,0	22	0,180	100
10316000203	NPT 1/2"	Black	6,0	27	0,250	100
10316000204	NPT 3/4"	Black	7,0	36	0,550	100
10316000205	NPT 1"	Black	7,0	42	0,680	100
10316000003	NPT 1/2"	Grey	6,0	27	0,250	100
10316000004	NPT 3/4"	Grey	7,0	36	0,550	100
10316000002	NPT 3/8"	Grey	5,0	22	0,180	100

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.