


## GMK-P | for PG threads

## Accessories

Counternut especially for PG plastic threads

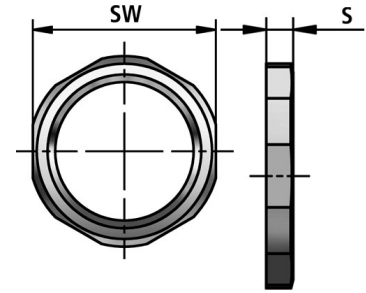

**Temperature:** -40 °C ... +100°C

**Material:** polyamide, fibre-glass reinforced

## CHARACTERISTICS:

- Properties: resistant against light acids and soft lyes
- resistant against sea water, benzene and mineral oil



FLEXA No.	Thread type	Colour	S [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
10310000207	PG 7	Black	5,0	19	0,130	100
10310000209	PG 9	Black	5,0	22	0,160	100
10310000211	PG 11	Black	5,0	24	0,160	100
10310000213	PG 13,5	Black	6,0	27	0,250	100
10310000216	PG 16	Black	6,0	30	0,310	100
10310000221	PG 21	Black	7,0	36	0,430	100
10310000229	PG 29	Black	7,0	46	0,660	100
10310000236	PG 36	Black	8,0	60	1,240	50
10310000248	PG 48	Black	8,0	70	1,560	25
10310000007	PG 7	Grey	5,0	19	0,130	100
10310000009	PG 9	Grey	5,0	22	0,160	100
10310000011	PG 11	Grey	5,0	24	0,160	100
10310000013	PG 13,5	Grey	6,0	27	0,250	100
10310000016	PG 16	Grey	6,0	30	0,310	100
10310000021	PG 21	Grey	7,0	36	0,430	100
10310000029	PG 29	Grey	7,0	46	0,660	100
10310000036	PG 36	Grey	8,0	60	1,240	50
10310000048	PG 48	Grey	8,0	70	1,560	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.