

AIRflex-GRS-FOOD

Protective plastic conduits

Protective all-plastic conduit. plain inside and outside surfaces, helix of rigid plastic, food-safe


Temperature: -25°C ... +50°C ^ +70°C

Material: PVC

IP class [acc. to EN 60529]: IP 68

CHARACTERISTICS:

- Properties: food-safe
- microbe resistant
- flexible
- airtight and liquid tight
- widely resistant to oil and acids
- free of silicone and cadmium
- unplasticized
- plain inside and outside, easy drawing-in of cables and cleaning outside surface of conduits

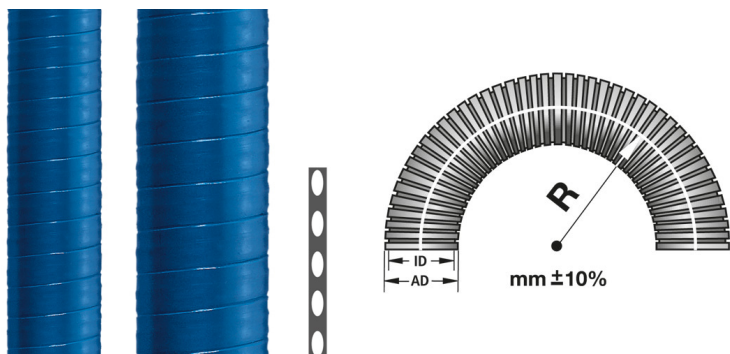

APPLICATIONS:

- Application: food and beverage industry / automation / electrical installations / machine and plant constructions



ELECTRO PRODUCTS CORP.

FLEXA No.	Colour	OD [mm]	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
10220904016	Blue	1/2 inch	16,0	21,0	70	175	0,175	50
10220904021	Blue	3/4 inch	21,0	27,0	85	210	0,240	50
10220904029	Blue	1 inch	26,2	33	125	310	0,410	25
10220904038	Blue	1 1/4 inch	35	42	160	400	0,530	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.